

ISO Insert Series for Cast Iron Turning

Reduced cycle times!

New coating for speeds up to 600 m/min.



MC5005
MC5015

+ ***LK***
MK
RK

ISO insert series for Cast Iron Turning


MC5005/MC5015

Extra thick Al₂O₃ coating layer

Achieved by combining the latest coating technologies.

Thickness comparisons of Al₂O₃

Doubled thickness when compared to conventional Al₂O₃ coating layers.

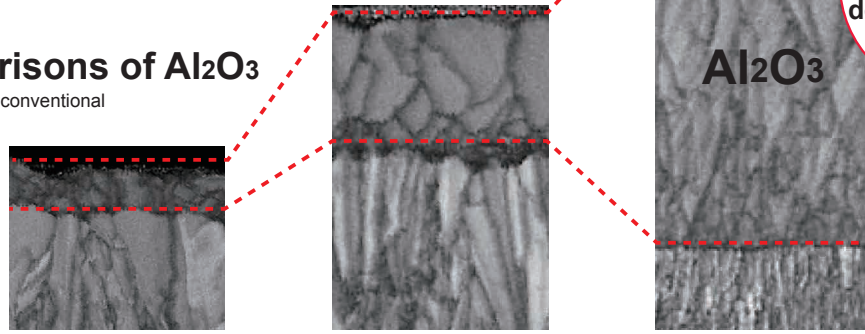

Conventional A

Conventional B

MC5005

Al₂O₃ coating-
more than
double thickness

*Based on our research.


Patented technology

Nano-Texture Coating Technology


The optimised crystal growth, Nano-Texture coating technology gives outstanding wear and chipping resistance.

Conventional technology

Surface texture after coating






Section of coating structure



Crystallographic structure




Nano-texture

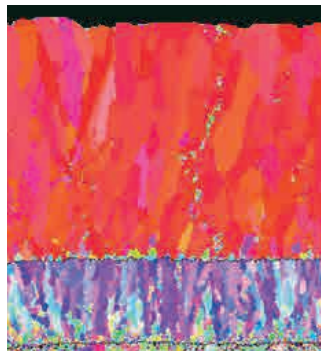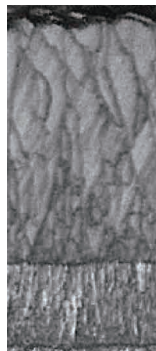


Optimised
crystal growth
condition

Similar colours demonstrates uniform growth direction of the crystals.

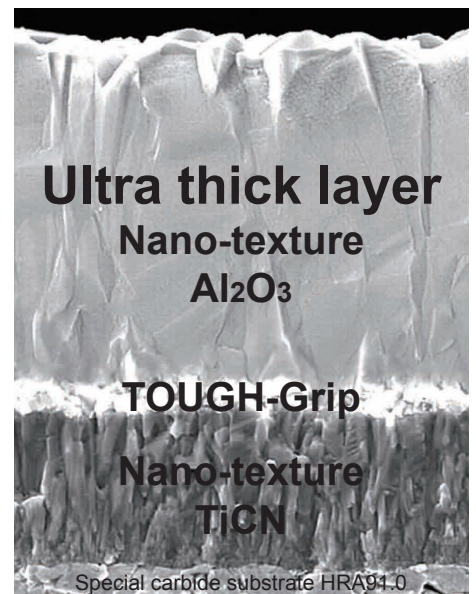

Special carbide substrate HRA91.0

MC5005

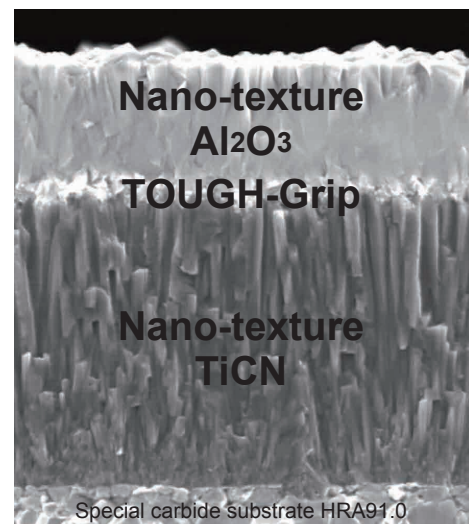


Special carbide substrate HRA91.0

MC5015

Patented technology

TOUGH-Grip Technology


The interface between the layers is controlled at the nano level, allowing the TOUGH GRIP layer extremely high levels of adhesion to prevent delamination.

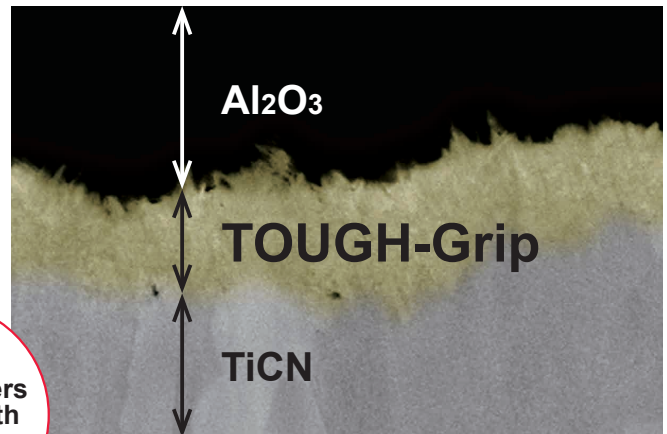

Coating layers with strength and toughness

TOUGH-Grip performance comparison

Conventional thick layers show the adverse affects of peeling.

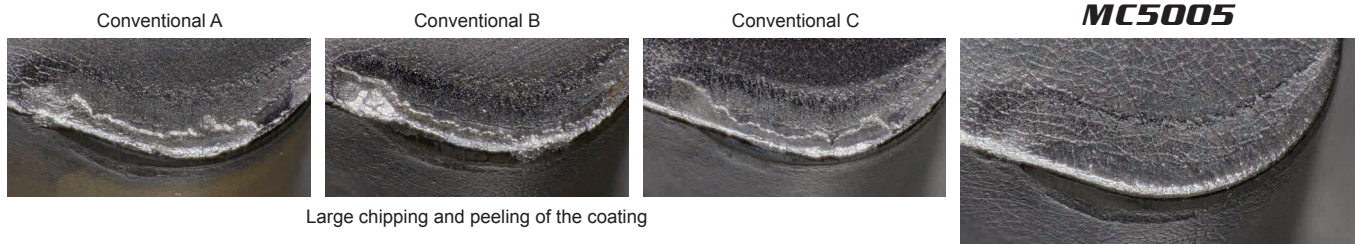

Large chipping and peeling of the coating


Normal wear

<Cutting conditions>

- Work material : FCD700
- Inserts : CNMA120412
- Cutting speed : 300 m/min
- Feed rate : 0.3 mm/rev
- Depth of cut : 2.0 mm
- Cutting mode : Wet cutting
- Cutting time : 4 min

Application range

Speeds normally associated with ceramic grades are now achievable. Reduction of costs when machining cast iron parts by using high efficiency methods is now possible because of improved tool life and cutting edge reliability.

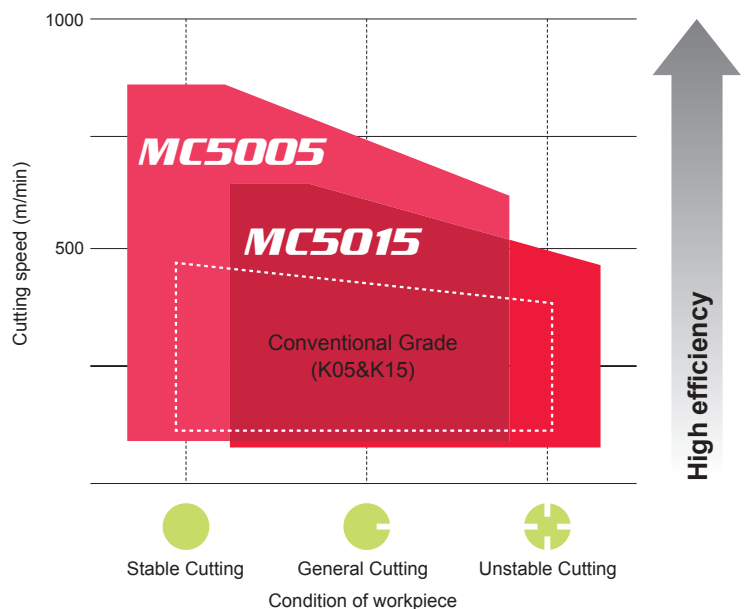


New chip breaker system for cast iron turning

The entire range of new chip breakers has been designed by taking advantage of the properties of the new grades. Each breaker has the optimum suitability for each respective application.

Negative Inserts

LK/MK/RK/Flat Top, GK/MAbreaker


Chip breaker is selectable according to the machining conditions.

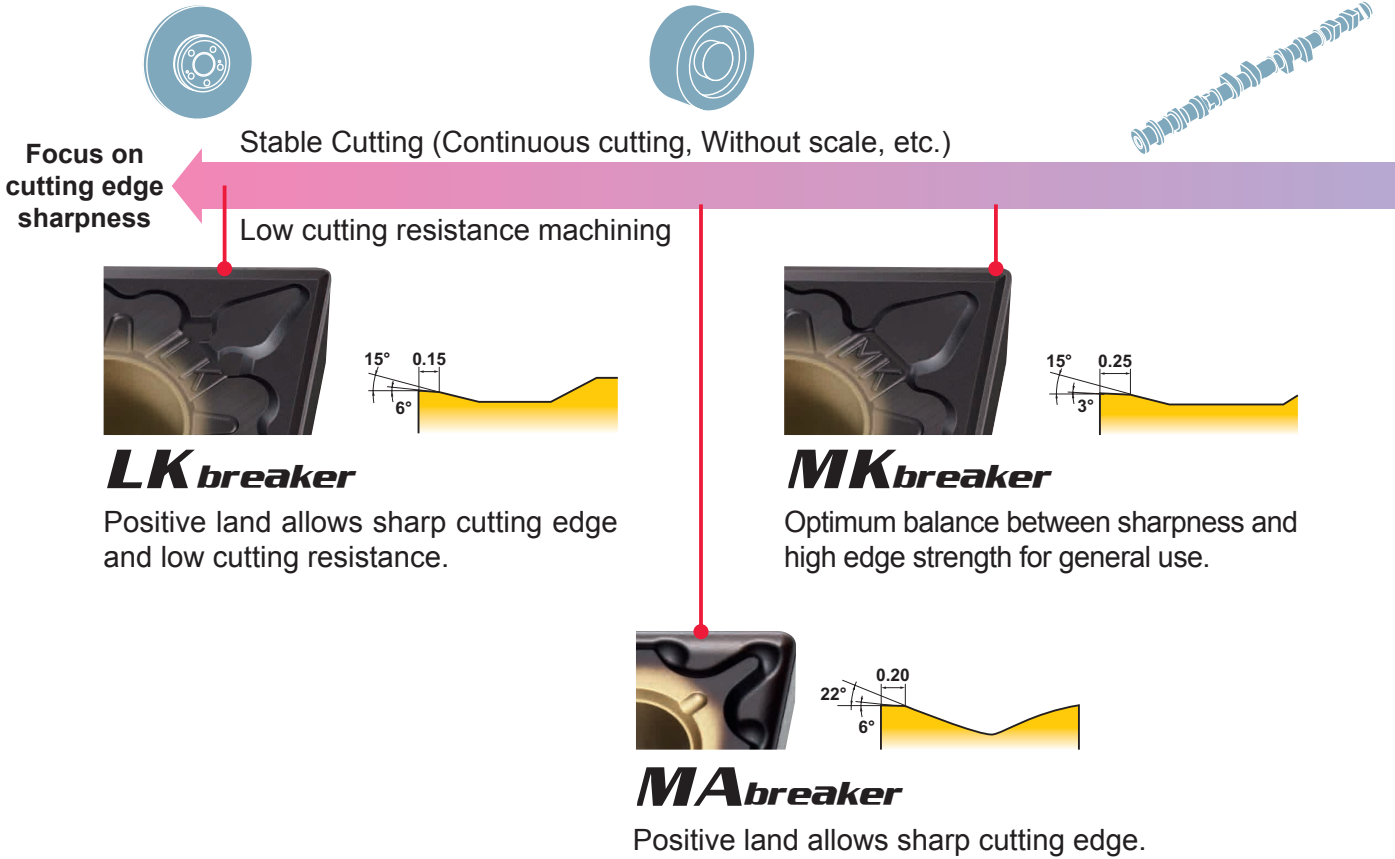

Positive Inserts

MK breaker/Flat Top

Chip breaker is selectable according to the machining conditions.

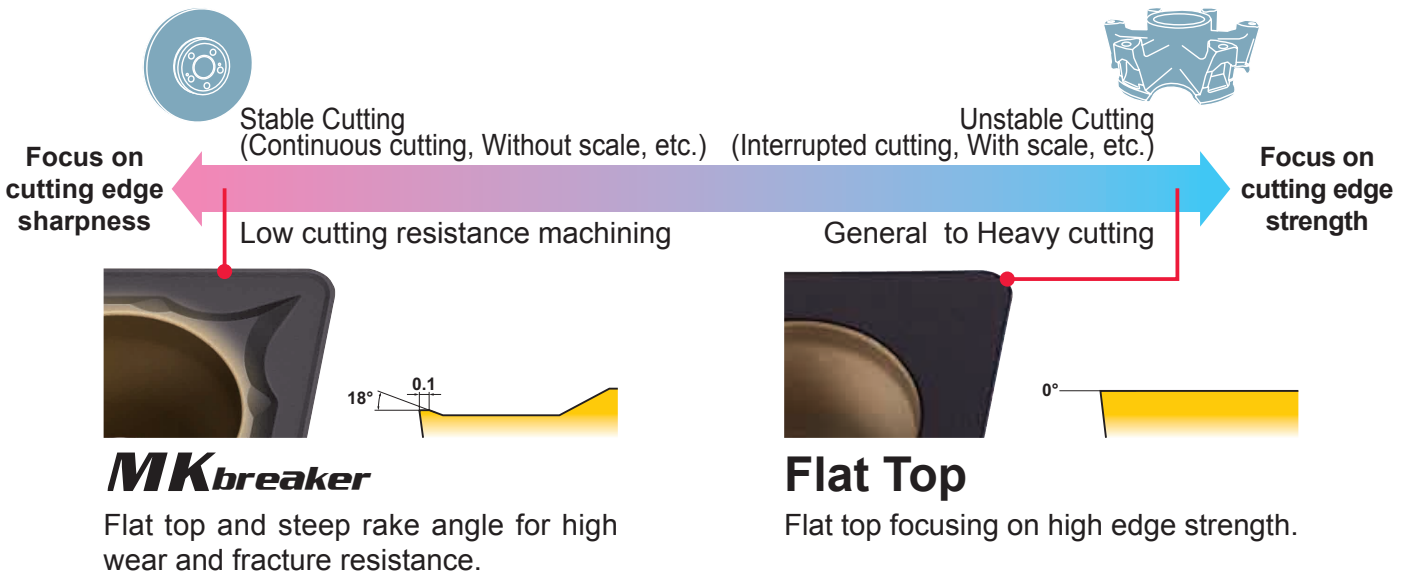




Unstable Cutting (Interrupted cutting, With scale, etc.)

Focus on cutting edge strength

General to Heavy cutting




RKbreaker

Extra wide land provides a stable cutting edge for interrupted machining and removal of scale.



Flat Top


Flat top focusing on high edge strength.



GKbreaker

Versatile standard breaker. Flat land maintains a stable cutting edge.

Application map for cast iron

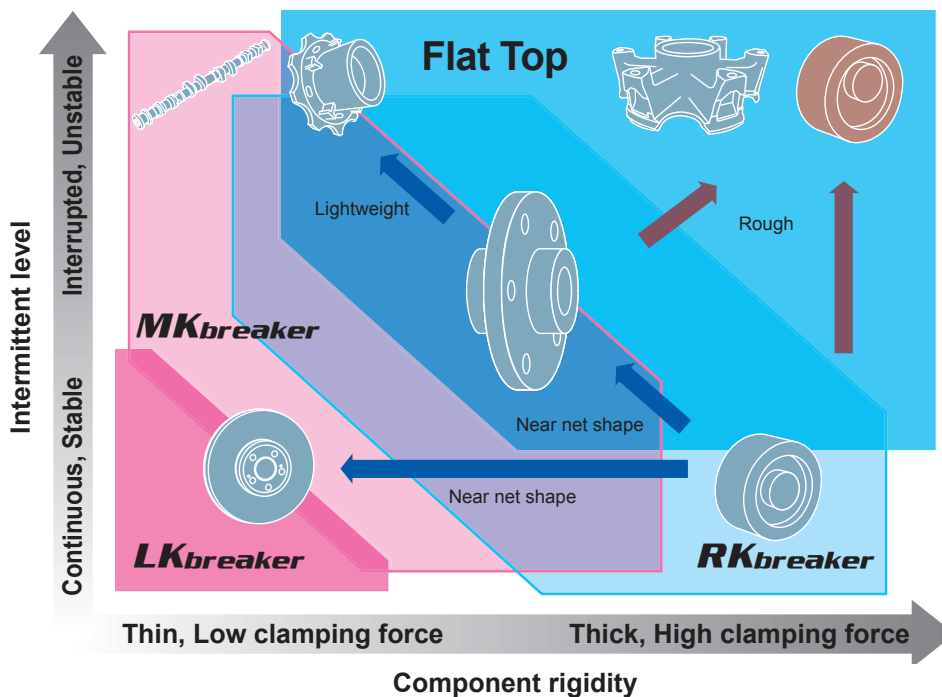


ISO INSERT SERIES FOR CAST IRON TURNING

MC5005/MC5015

Negative Inserts (With hole)

M Class

CNMG
CNMA

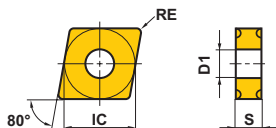

Light Cutting	Light Cutting	Medium Cutting	Medium Cutting	Medium Cutting
LK	SW (Wiper)	MA	MK	MW (Wiper)
Medium Cutting		Rough Cutting	Rough Cutting	
GK	RK	Flat Top		

Order Number	Cutting Area	Stock		Dimensions (mm)			
		MC5005	MC5015	IC	S	RE	D1
CNMG120404-LK	L	●	●	12.7	4.76	0.4	5.16
CNMG120408-LK	L	●	●	12.7	4.76	0.8	5.16
CNMG120412-LK	L	●	●	12.7	4.76	1.2	5.16
CNMG120404-SW	L	★	●	12.7	4.76	0.4	5.16
CNMG120408-SW	L	★	●	12.7	4.76	0.8	5.16
CNMG120404-MA	M	●	●	12.7	4.76	0.4	5.16
CNMG120408-MA	M	●	●	12.7	4.76	0.8	5.16
CNMG120412-MA	M	●	●	12.7	4.76	1.2	5.16
CNMG120404-MK	M	●	●	12.7	4.76	0.4	5.16
CNMG120408-MK	M	●	●	12.7	4.76	0.8	5.16
CNMG120412-MK	M	●	●	12.7	4.76	1.2	5.16
CNMG120416-MK	M	★	●	12.7	4.76	1.6	5.16
NEW CNMG160608-MK	M	●	●	15.875	6.35	0.8	6.35
CNMG160612-MK	M	●	●	15.875	6.35	1.2	6.35
CNMG160616-MK	M	●	●	15.875	6.35	1.6	6.35
CNMG190612-MK	M	★	●	19.05	6.35	1.2	7.93
CNMG190616-MK	M	★	●	19.05	6.35	1.6	7.93
CNMG120408-MW	M	●	●	12.7	4.76	0.8	5.16
CNMG120412-MW	M	●	●	12.7	4.76	1.2	5.16
CNMG120404-GK	M	●	●	12.7	4.76	0.4	5.16
CNMG120408-GK	M	●	●	12.7	4.76	0.8	5.16
CNMG120412-GK	M	●	●	12.7	4.76	1.2	5.16


Order Number	Cutting Area	Stock		Dimensions (mm)			
		MC5005	MC5015	IC	S	RE	D1
CNMG120408-RK	R	●	●	12.7	4.76	0.8	5.16
CNMG120412-RK	R	●	●	12.7	4.76	1.2	5.16
CNMG120416-RK	R	●	●	12.7	4.76	1.6	5.16
NEW CNMG160608-RK	R	●	●	15.875	6.35	0.8	6.35
CNMG160612-RK	R	●	●	15.875	6.35	1.2	6.35
CNMG160616-RK	R	●	●	15.875	6.35	1.6	6.35
CNMG190612-RK	R	★	●	19.05	6.35	1.2	7.93
CNMG190616-RK	R	★	●	19.05	6.35	1.6	7.93
CNMA120404	R	●	●	12.7	4.76	0.4	5.16
CNMA120408	R	●	●	12.7	4.76	0.8	5.16
CNMA120412	R	●	●	12.7	4.76	1.2	5.16
CNMA120416	R	●	●	12.7	4.76	1.6	5.16
CNMA160612	R	●	●	15.875	6.35	1.2	6.35
CNMA160616	R	●	●	15.875	6.35	1.6	6.35
CNMA190612	R	●	●	19.05	6.35	1.2	7.93
CNMA190616	R	●	●	19.05	6.35	1.6	7.93
NEW CNMA190624	R	●	●	19.05	6.35	2.4	7.93

● : Inventory maintained. ★ : Inventory maintained in Japan.

Negative Inserts (With hole)

M Class

DNMG
DNMX
DNMA

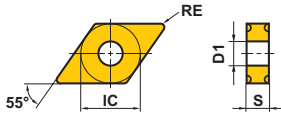

Light Cutting LK	Medium Cutting MA	Medium Cutting MK	Medium Cutting MW (Wiper)
Medium Cutting GK	Rough Cutting RK	Rough Cutting Flat Top	

Order Number	Cutting Area	Stock		Dimensions (mm)			
		MC5005	MC5015	IC	S	RE	D1
NEW DNMG110408-LK	L	●	●	9.525	4.76	0.8	3.81
DNMG150404-LK	L	●	●	12.7	4.76	0.4	5.16
DNMG150408-LK	L	●	●	12.7	4.76	0.8	5.16
DNMG150412-LK	L	★	★	12.7	4.76	1.2	5.16
DNMG150604-LK	L	●	●	12.7	6.35	0.4	5.16
DNMG150608-LK	L	●	●	12.7	6.35	0.8	5.16
DNMG150612-LK	L	●	●	12.7	6.35	1.2	5.16
DNMG150404-MA	M	●	●	12.7	4.76	0.4	5.16
DNMG150408-MA	M	●	●	12.7	4.76	0.8	5.16
DNMG150412-MA	M	★	★	12.7	4.76	1.2	5.16
DNMG150604-MA	M	●	●	12.7	6.35	0.4	5.16
DNMG150608-MA	M	●	●	12.7	6.35	0.8	5.16
DNMG150612-MA	M	●	●	12.7	6.35	1.2	5.16
NEW DNMG110408-MK	M	●	●	9.525	4.76	0.8	3.81
DNMG150404-MK	M	●	●	12.7	4.76	0.4	5.16
DNMG150408-MK	M	●	●	12.7	4.76	0.8	5.16
DNMG150412-MK	M	●	●	12.7	4.76	1.2	5.16
DNMG150604-MK	M	●	●	12.7	6.35	0.4	5.16
DNMG150608-MK	M	●	●	12.7	6.35	0.8	5.16
DNMG150612-MK	M	●	●	12.7	6.35	1.2	5.16
DNMX150408-MW	M	★	●	12.7	4.76	0.8	5.16
DNMX150412-MW	M	★	●	12.7	4.76	1.2	5.16
DNMX150608-MW	M	●	●	12.7	6.35	0.8	5.16
DNMX150612-MW	M	●	●	12.7	6.35	1.2	5.16
DNMG150404-GK	M	●	●	12.7	4.76	0.4	5.16
DNMG150408-GK	M	●	●	12.7	4.76	0.8	5.16
DNMG150412-GK	M	●	●	12.7	4.76	1.2	5.16
DNMG150604-GK	M	●	●	12.7	6.35	0.4	5.16
DNMG150608-GK	M	●	●	12.7	6.35	0.8	5.16
DNMG150612-GK	M	●	●	12.7	6.35	1.2	5.16

Order Number	Cutting Area	Stock		Dimensions (mm)			
		MC5005	MC5015	IC	S	RE	D1
DNMG150408-RK	R	●	●	12.7	4.76	0.8	5.16
DNMG150412-RK	R	●	●	12.7	4.76	1.2	5.16
DNMG150608-RK	R	●	●	12.7	6.35	0.8	5.16
DNMG150612-RK	R	●	●	12.7	6.35	1.2	5.16
DNMA150404	R	●	●	12.7	4.76	0.4	5.16
DNMA150408	R	●	●	12.7	4.76	0.8	5.16
DNMA150412	R	●	●	12.7	4.76	1.2	5.16
DNMA150604	R	●	●	12.7	6.35	0.4	5.16
DNMA150608	R	●	●	12.7	6.35	0.8	5.16
DNMA150612	R	●	●	12.7	6.35	1.2	5.16



ISO INSERT SERIES FOR CAST IRON TURNING

MC5005/MC5015

Negative Inserts (With hole)

M Class

SNMG
SNMA

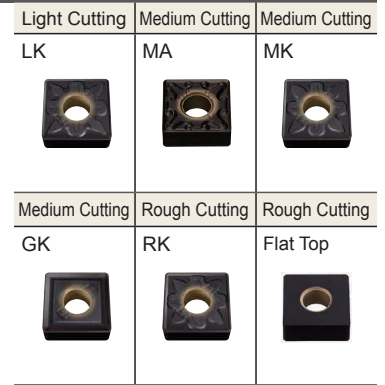


Order Number	Cutting Area	Stock		Dimensions (mm)			
		MC5005	MC5015	IC	S	RE	D1
SNMG120408-LK	L	●	●	12.7	4.76	0.8	5.16
SNMG120412-LK	L	●	●	12.7	4.76	1.2	5.16
SNMG120404-MA	M	●	●	12.7	4.76	0.4	5.16
SNMG120408-MA	M	●	●	12.7	4.76	0.8	5.16
SNMG120412-MA	M	●	●	12.7	4.76	1.2	5.16
SNMG120408-MK	M	●	●	12.7	4.76	0.8	5.16
SNMG120412-MK	M	●	●	12.7	4.76	1.2	5.16
SNMG120416-MK	M	★	●	12.7	4.76	1.6	5.16
NEW SNMG150612-MK	M	●	●	15.875	6.35	1.2	6.35
NEW SNMG150616-MK	M	●	●	15.875	6.35	1.6	6.35
SNMG190612-MK	M	★	●	19.05	6.35	1.2	7.93
SNMG190616-MK	M	★	●	19.05	6.35	1.6	7.93
SNMG120404-GK	R	●	●	12.7	4.76	0.4	5.16
SNMG120408-GK	R	●	●	12.7	4.76	0.8	5.16
SNMG120412-GK	R	●	●	12.7	4.76	1.2	5.16

Order Number	Cutting Area	Stock		Dimensions (mm)			
		MC5005	MC5015	IC	S	RE	D1
SNMG120408-RK	R	●	●	12.7	4.76	0.8	5.16
SNMG120412-RK	R	●	●	12.7	4.76	1.2	5.16
SNMG120416-RK	R	●	●	12.7	4.76	1.6	5.16
NEW SNMG150612-RK	R	●	●	15.875	6.35	1.2	6.35
NEW SNMG150616-RK	R	●	●	15.875	6.35	1.6	6.35
SNMG190612-RK	R	★	●	19.05	6.35	1.2	7.93
SNMG190616-RK	R	★	●	19.05	6.35	1.6	7.93
SNMA090308	R	★	★	9.525	3.18	0.8	3.81
SNMA120408	R	●	●	12.7	4.76	0.8	5.16
SNMA120412	R	●	●	12.7	4.76	1.2	5.16
SNMA120416	R	●	●	12.7	4.76	1.6	5.16
NEW SNMA150612	R	●	●	15.875	6.35	1.2	6.35
NEW SNMA150616	R	●	●	15.875	6.35	1.6	6.35
SNMA190612	R	●	●	19.05	6.35	1.2	7.93
SNMA190616	R	●	●	19.05	6.35	1.6	7.93

● : Inventory maintained. ★ : Inventory maintained in Japan.

Negative Inserts (With hole)

M Class

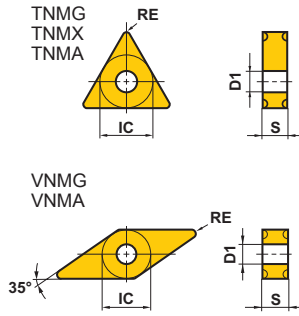

Light Cutting LK	Medium Cutting MA	Medium Cutting MK	Medium Cutting MW (Wiper)	Medium Cutting GK	Rough Cutting RK
Rough Cutting Flat Top	Light Cutting LK	Medium Cutting MA	Medium Cutting MK	Medium Cutting GK	Rough Cutting Flat Top

Order Number	Cutting Area	Stock		Dimensions (mm)			
		MC5005	MC5015	IC	S	RE	D1
TNMG160404-LK	L	●	●	9.525	4.76	0.4	3.81
TNMG160408-LK	L	●	●	9.525	4.76	0.8	3.81
TNMG160412-LK	L	★	●	9.525	4.76	1.2	3.81
TNMG160404-MA	M	●	●	9.525	4.76	0.4	3.81
TNMG160408-MA	M	●	●	9.525	4.76	0.8	3.81
TNMG160412-MA	M	★	●	9.525	4.76	1.2	3.81
TNMG220408-MA	M	★	★	12.7	4.76	0.8	5.16
TNMG220412-MA	M	★	★	12.7	4.76	1.2	5.16
TNMG160404-MK	M	●	●	9.525	4.76	0.4	3.81
TNMG160408-MK	M	●	●	9.525	4.76	0.8	3.81
TNMG160412-MK	M	●	●	9.525	4.76	1.2	3.81
TNMG220408-MK	M	★	●	12.7	4.76	0.8	5.16
TNMG220412-MK	M	★	★	12.7	4.76	1.2	5.16
TNMG220416-MK	M	★	★	12.7	4.76	1.6	5.16
TNMX160408-MW	M	●	●	9.525	4.76	0.8	3.81
TNMX160412-MW	M	●	●	9.525	4.76	1.2	3.81
TNMG160404-GK	M	●	●	9.525	4.76	0.4	3.81
TNMG160408-GK	M	●	●	9.525	4.76	0.8	3.81
TNMG160412-GK	M	●	●	9.525	4.76	1.2	3.81
TNMG220408-GK	M	★	●	12.7	4.76	0.8	5.16
TNMG220412-GK	M	★	★	12.7	4.76	1.2	5.16
TNMG160408-RK	R	●	●	9.525	4.76	0.8	3.81
TNMG160412-RK	R	●	●	9.525	4.76	1.2	3.81
TNMG160416-RK	R	●	●	9.525	4.76	1.6	3.81
TNMG220408-RK	R	●	●	12.7	4.76	0.8	5.16
TNMG220412-RK	R	●	●	12.7	4.76	1.2	5.16
TNMG220416-RK	R	●	●	12.7	4.76	1.6	5.16
TNMA160404	R	●	●	9.525	4.76	0.4	3.81
TNMA160408	R	●	●	9.525	4.76	0.8	3.81
TNMA160412	R	●	●	9.525	4.76	1.2	3.81
TNMA160416	R	●	●	9.525	4.76	1.6	3.81
TNMA160420	R	★	★	9.525	4.76	2.0	3.81
TNMA220408	R	●	●	12.7	4.76	0.8	5.16
TNMA220412	R	●	●	12.7	4.76	1.2	5.16
TNMA220416	R	●	●	12.7	4.76	1.6	5.16


Order Number	Cutting Area	Stock		Dimensions (mm)			
		MC5005	MC5015	IC	S	RE	D1
VNMG160404-LK	L	●	●	9.525	4.76	0.4	3.81
VNMG160408-LK	L	●	●	9.525	4.76	0.8	3.81
VNMG160404-MA	M	●	●	9.525	4.76	0.4	3.81
VNMG160408-MA	M	●	●	9.525	4.76	0.8	3.81
VNMG160404-MK	M	●	●	9.525	4.76	0.4	3.81
VNMG160408-MK	M	●	●	9.525	4.76	0.8	3.81
VNMG160412-MK	M	●	●	9.525	4.76	1.2	3.81
VNMG160404-GK	M	●	●	9.525	4.76	0.4	3.81
VNMG160408-GK	M	●	●	9.525	4.76	0.8	3.81
NEW VNMG160412-GK	M	●	●	9.525	4.76	1.2	3.81
NEW VNMA160404	R	●	●	9.525	4.76	0.4	3.81
NEW VNMA160408	R	●	●	9.525	4.76	0.8	3.81
NEW VNMA160412	R	●	●	9.525	4.76	1.2	3.81

MC5005/MC5015

Negative Inserts (With hole)

M Class

WNMG
WNMA



Light Cutting LK	Light Cutting SW (Wiper)	Medium Cutting MA	Medium Cutting MK	Medium Cutting MW (Wiper)
Medium Cutting GK	Rough Cutting RK	Rough Cutting Flat Top		

Order Number	Cutting Area	Stock		Dimensions (mm)			
		MC5005	MC5015	IC	S	RE	D1
WNMG080404-LK	L	●	●	12.7	4.76	0.4	5.16
WNMG080408-LK	L	●	●	12.7	4.76	0.8	5.16
WNMG080412-LK	L	●	●	12.7	4.76	1.2	5.16
WNMG080404-SW	L	★	★	12.7	4.76	0.4	5.16
WNMG080408-SW	L	★	●	12.7	4.76	0.8	5.16
WNMG060408-MA	M	★	●	9.525	4.76	0.8	3.81
WNMG060412-MA	M	★	●	9.525	4.76	1.2	3.81
WNMG080404-MA	M	●	●	12.7	4.76	0.4	5.16
WNMG080408-MA	M	●	●	12.7	4.76	0.8	5.16
WNMG080412-MA	M	●	●	12.7	4.76	1.2	5.16
WNMG080404-MK	M	●	●	12.7	4.76	0.4	5.16
WNMG080408-MK	M	●	●	12.7	4.76	0.8	5.16
WNMG080412-MK	M	●	●	12.7	4.76	1.2	5.16
WNMG080416-MK	M	★	●	12.7	4.76	1.6	5.16
WNMG060408-MW	M	●	●	9.525	4.76	0.8	3.81
WNMG060412-MW	M	●	●	9.525	4.76	1.2	3.81
WNMG080408-MW	M	●	●	12.7	4.76	0.8	5.16
WNMG080412-MW	M	●	●	12.7	4.76	1.2	5.16
WNMG060404-GK	M	★	★	9.525	4.76	0.4	3.81
WNMG060408-GK	M	★	★	9.525	4.76	0.8	3.81
WNMG080404-GK	M	●	●	12.7	4.76	0.4	5.16
WNMG080408-GK	M	●	●	12.7	4.76	0.8	5.16
WNMG080412-GK	M	●	●	12.7	4.76	1.2	5.16



Order Number	Cutting Area	Stock		Dimensions (mm)			
		MC5005	MC5015	IC	S	RE	D1
WNMG080408-RK	R	●	●	12.7	4.76	0.8	5.16
WNMG080412-RK	R	●	●	12.7	4.76	1.2	5.16
WNMG080416-RK	R	●	●	12.7	4.76	1.6	5.16
NEW WNMA060408	R	●	●	9.525	4.76	0.8	3.81
NEW WNMA060412	R	●	●	9.525	4.76	1.2	3.81
WNMA080404	R	●	●	12.7	4.76	0.4	5.16
WNMA080408	R	●	●	12.7	4.76	0.8	5.16
WNMA080412	R	●	●	12.7	4.76	1.2	5.16
WNMA080416	R	●	●	12.7	4.76	1.6	5.16

● : Inventory maintained. ★ : Inventory maintained in Japan.

Negative Inserts (Without hole)

M Class

CNMN

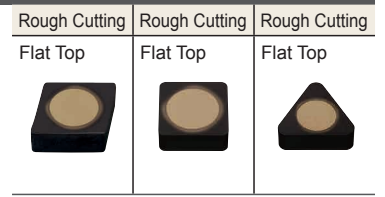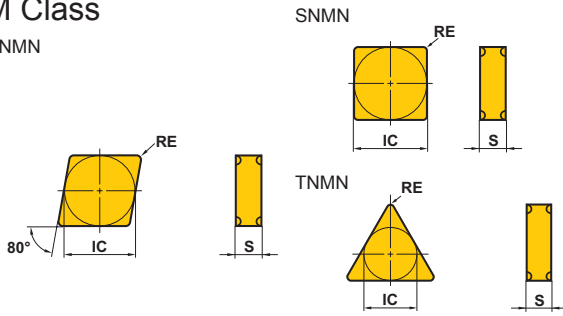




Order Number	Cutting Area	Stock		Dimensions (mm)			
		MC5005	MC5015	IC	S	RE	D1
NEW CNMN120408	R	●	●	12.7	4.76	0.8	—
NEW CNMN120412	R	●	●	12.7	4.76	1.2	—
NEW CNMN120416	R	●	●	12.7	4.76	1.6	—
SNMN120408	R	★	●	12.7	4.76	0.8	—
SNMN120412	R	★	●	12.7	4.76	1.2	—
SNMN120416	R	★	★	12.7	4.76	1.6	—
TNMN160408	R	★	●	9.525	4.76	0.8	—
TNMN160412	R	★	●	9.525	4.76	1.2	—
TNMN160416	R	★	★	9.525	4.76	1.6	—


MC5005/MC5015

5° Positive inserts (With hole)

M Class

VBMT
VBMW

Medium Cutting	Medium Cutting	Rough Cutting
MK	MV	Flat Top
		

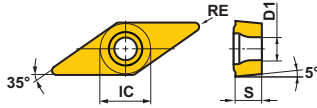


Order Number	Cutting Area	Stock		Dimensions (mm)			
		MC5005	MC5015	IC	S	RE	D1
VBMT160404-MK	M	★	★	9.525	4.76	0.4	4.4
VBMT160408-MK	M	★	★	9.525	4.76	0.8	4.4
NEW VBMT110304-MV	M		●	6.35	3.18	0.4	2.9
NEW VBMT110308-MV	M		●	6.35	3.18	0.8	2.9
NEW VBMT160404-MV	M		●	9.525	4.76	0.4	4.4
NEW VBMT160408-MV	M		●	9.525	4.76	0.8	4.4
VBMW160408	R	★	★	9.525	4.76	0.8	4.4

● : Inventory maintained. ★ : Inventory maintained in Japan.


7° Positive inserts (With hole)

M Class


CCMT
CCMH
CCMW

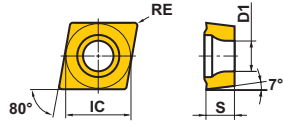

DCMT
DCMW

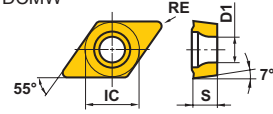

RCMX



Medium Cutting	Medium Cutting	Medium Cutting	Medium Cutting
MK	MV	Standard	MK
			
Medium Cutting	Medium Cutting	Medium Cutting	
MV	Standard	Standard	
			

Order Number	Cutting Area	Stock		Dimensions (mm)			
		MC5005	MC5015	IC	S	RE	D1
CCMT060204-MK	M	●	●	6.35	2.38	0.4	2.8
CCMT060208-MK	M	●	●	6.35	2.38	0.8	2.8
CCMT09T304-MK	M	●	●	9.525	3.97	0.4	4.4
CCMT09T308-MK	M	●	●	9.525	3.97	0.8	4.4
CCMT120404-MK	M	●	●	12.7	4.76	0.4	5.5
CCMT120408-MK	M	●	●	12.7	4.76	0.8	5.5
NEW CCMT120412-MK	M	●	●	12.7	4.76	1.2	5.5
NEW CCMH060204-MV	M		●	6.35	2.38	0.4	2.8
CCMW060204	M	●	●	6.35	2.38	0.4	2.8
CCMW060208	M	★	★	6.35	2.38	0.8	2.8
CCMW09T304	M	●	●	9.525	3.97	0.4	4.4
CCMW09T308	M	●	●	9.525	3.97	0.8	4.4
CCMW09T312	M	★	★	9.525	3.97	1.2	4.4
CCMW120404	M	●	●	12.7	4.76	0.4	5.5
CCMW120408	M	●	●	12.7	4.76	0.8	5.5
CCMW120412	M	★	●	12.7	4.76	1.2	5.5



Order Number	Cutting Area	Stock		Dimensions (mm)			
		MC5005	MC5015	IC	S	RE	D1
DCMT070204-MK	M	★	●	6.35	2.38	0.4	2.8
NEW DCMT070208-MK	M	●	●	6.35	2.38	0.8	2.8
DCMT11T304-MK	M	●	●	9.525	3.97	0.4	4.4
DCMT11T308-MK	M	●	●	9.525	3.97	0.8	4.4
DCMT150404-MK	M	★	●	12.7	4.76	0.4	5.5
DCMT150408-MK	M	★	●	12.7	4.76	0.8	5.5
NEW DCMT070204-MV	M		●	6.35	2.38	0.4	2.8
NEW DCMT070208-MV	M		●	6.35	2.38	0.8	2.8
NEW DCMT11T304-MV	M		●	9.525	3.97	0.4	4.4
NEW DCMT11T308-MV	M		●	9.525	3.97	0.8	4.4
DCMW070204	M	●	●	6.35	2.38	0.4	2.8
DCMW11T304	M	●	●	9.525	3.97	0.4	4.4
DCMW11T308	M	●	●	9.525	3.97	0.8	4.4
RCMX1204M0	M		●	12.7	4.76	—	4.2

MC5005/MC5015

7° Positive inserts (With hole)

M Class

SCMT
SCMW

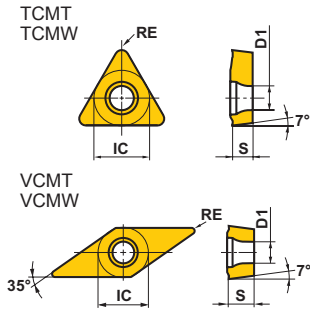

Medium Cutting	Medium Cutting	Medium Cutting	Medium Cutting
MK	Standard	MK	MV
Medium Cutting	Medium Cutting	Medium Cutting	
Standard	MK	Standard	

Order Number	Cutting Area	Stock		Dimensions (mm)			
		MC5005	MC5015	IC	S	RE	D1
SCMT09T304-MK	M	●	●	9.525	3.97	0.4	4.4
SCMT09T308-MK	M	●	●	9.525	3.97	0.8	4.4
NEW SCMT120404-MK	M	●	●	12.7	4.76	0.4	5.5
SCMT120408-MK	M	●	●	12.7	4.76	0.8	5.5
SCMW09T304	M	●	●	9.525	3.97	0.4	4.4
SCMW09T308	M	●	●	9.525	3.97	0.8	4.4
SCMW120408	M	●	●	12.7	4.76	0.8	5.5
TCMT110204-MK	M	★	●	6.35	2.38	0.4	2.8
NEW TCMT110208-MK	M	●	●	6.35	2.38	0.8	2.8
TCMT16T304-MK	M	●	●	9.525	3.97	0.4	4.4
TCMT16T308-MK	M	●	●	9.525	3.97	0.8	4.4
TCMT16T312-MK	M	★	●	9.525	3.97	1.2	4.4
TCMW110204	M	●	●	6.35	2.38	0.4	2.8
TCMW16T304	M	●	●	9.525	3.97	0.4	4.4
TCMW16T308	M	●	●	9.525	3.97	0.8	4.4
TCMW16T312	M	★	★	9.525	3.97	1.2	4.4


Order Number	Cutting Area	Stock		Dimensions (mm)			
		MC5005	MC5015	IC	S	RE	D1
VCMT160404-MK	M	●	●	9.525	4.76	0.4	4.4
VCMT160408-MK	M	●	●	9.525	4.76	0.8	4.4
NEW VCMT080204-MV	M		●	4.76	2.38	0.4	2.4
VCMW160404	M	●	●	9.525	4.76	0.4	4.4
VCMW160408	M	●	●	9.525	4.76	0.8	4.4

● : Inventory maintained. ★ : Inventory maintained in Japan.

11°Positive inserts

M Class

CPMH
TPMH
WPMT
TPMN

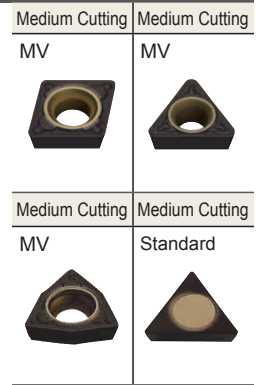

Order Number	Cutting Area	Stock		Dimensions (mm)			
		MC5005	MC5015	IC	S	RE	D1
NEW CPMH080204-MV	M	●	●	7.94	2.38	0.4	3.5
NEW CPMH080208-MV	M	●	●	7.94	2.38	0.8	3.5
NEW CPMH090304-MV	M	●	●	9.525	3.18	0.4	4.5
NEW CPMH090308-MV	M	●	●	9.525	3.18	0.8	4.5
NEW TPMH080204-MV	M	●	●	4.76	2.38	0.4	2.4
NEW TPMH090204-MV	M	●	●	5.56	2.38	0.4	2.9
NEW TPMH090208-MV	M	●	●	5.56	2.38	0.8	2.9
NEW TPMH110304-MV	M	●	●	6.35	3.18	0.4	3.4
NEW TPMH110308-MV	M	●	●	6.35	3.18	0.8	3.4
NEW TPMH160304-MV	M	●	●	9.525	3.18	0.4	4.4
NEW TPMH160308-MV	M	●	●	9.525	3.18	0.8	4.4

Order Number	Cutting Area	Stock		Dimensions (mm)			
		MC5005	MC5015	IC	S	RE	D1
NEW WPMT040204-MV	M	●	●	6.35	2.38	0.4	2.8
NEW WPMT060304-MV	M	●	●	9.525	3.18	0.4	4.4
NEW WPMT060308-MV	M	●	●	9.525	3.18	0.8	4.4
TPMN110304	M	●	●	6.35	3.18	0.4	—
TPMN110308	M	●	●	6.35	3.18	0.8	—
TPMN160304	M	●	●	9.525	3.18	0.4	—
TPMN160308	M	●	●	9.525	3.18	0.8	—
TPMN160312	M	●	●	9.525	3.18	1.2	—

ISO INSERT SERIES FOR CAST IRON TURNING

RECOMMENDED CUTTING CONDITIONS

Negative Inserts

Work Material	Tensile Strength	Grade	vc (m/min)	f (mm/rev)	ap (mm)
Cast Iron (FC300)	≤ 350 MPa	MC5005	210—600	0.1—0.5	0.3—6.0
		MC5015	190—450	0.1—0.5	0.3—6.0
Ductile Cast Iron (FCD450)	≤ 450 MPa	MC5005	200—435	0.1—0.5	0.3—5.0
		MC5015	180—395	0.1—0.5	0.3—5.0
Ductile Cast Iron (FCD700)	≤ 800 MPa	MC5005	175—385	0.1—0.5	0.3—4.0
		MC5015	160—350	0.1—0.5	0.3—4.0

*For internal cutting, please refer to the appropriate boring bar conditions.


Positive Inserts

Work Material	Tensile Strength	Grade	vc (m/min)	f (mm/rev)	ap (mm)
Cast Iron (FC300)	≤ 350 MPa	MC5005	170—475	0.08—0.3	0.3—3.0
		MC5015	155—355	0.08—0.3	0.3—3.0
Ductile Cast Iron (FCD450)	≤ 450 MPa	MC5005	160—345	0.08—0.3	0.3—2.5
		MC5015	145—320	0.08—0.3	0.3—2.5
Ductile Cast Iron (FCD700)	≤ 800 MPa	MC5005	140—305	0.08—0.3	0.3—2.0
		MC5015	130—275	0.08—0.3	0.3—2.0

*For internal cutting, please refer to the appropriate boring bar conditions.



Technical Data

Continuous cutting of GG30

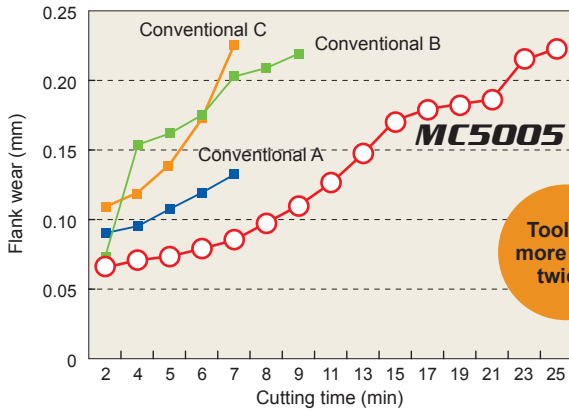


Tool life more than twice.

<Cutting conditions>
 Work material : GG30
 Insert : CNMA120412
 Cutting speed : 450 m/min
 Feed : 0.3 mm/rev
 Depth of cut : 2.0 mm
 Cutting mode : Dry Cutting




GGG70 interrupted turning

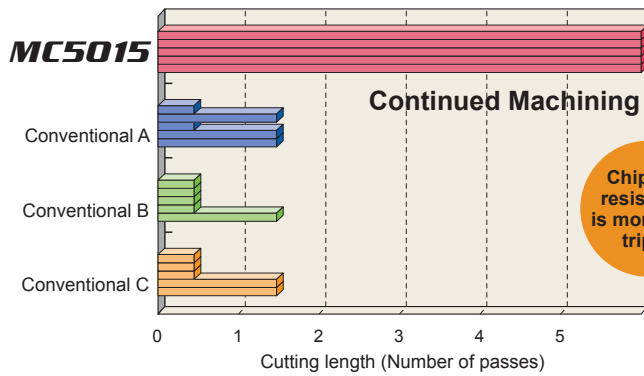


Chipping resistance is more than triple.

<Cutting conditions>
 Work material : GGG70
 Insert : CNMA120412
 Cutting speed : 150 m/min
 Feed : 0.3 mm/rev
 Depth of cut : 1.5 mm
 Cutting mode : Wet Cutting



GG20 Parts trial No.1


20 % increase in tool life was achieved even at 600 m/min cutting speeds.

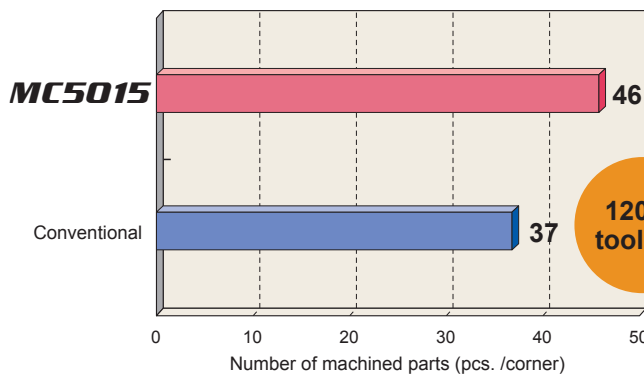

120 % tool life




<Cutting conditions>
 Work material : GG20 ID and OD turning of Brake disc
 Inserts : WNMA080412 Flat Top
 Cutting speed : 600 m/min
 Feed rate : 0.4 mm/rev
 Depth of cut : 2.0 mm
 Cutting mode : Wet cutting



GG30 Parts trial No.2

Higher wear resistance than ceramic grades.


After machining 210 pcs.

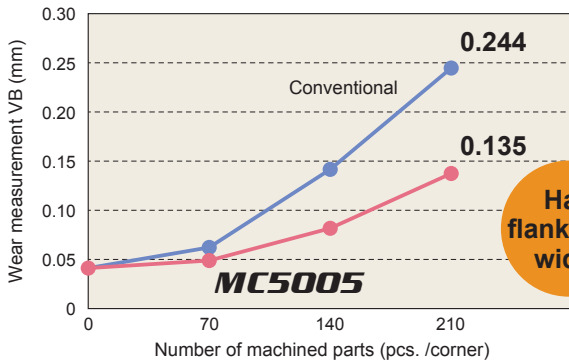

Half flankwear width



<Cutting conditions>
 Work material : GG30 Facing of Brake disc
 Inserts : CNMA120412 Flat Top
 Cutting speed : 450 m/min
 Feed rate : 0.25 mm/rev
 Depth of cut : 0.3 mm
 Cutting mode : Dry cutting




Technical Data

GGG70 Parts trial No.3


No breakage of the component during interrupted cutting.



Wear 0.29 mm
After machining 30 pcs.

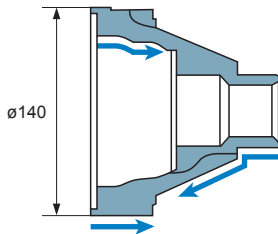

MC5005+MK

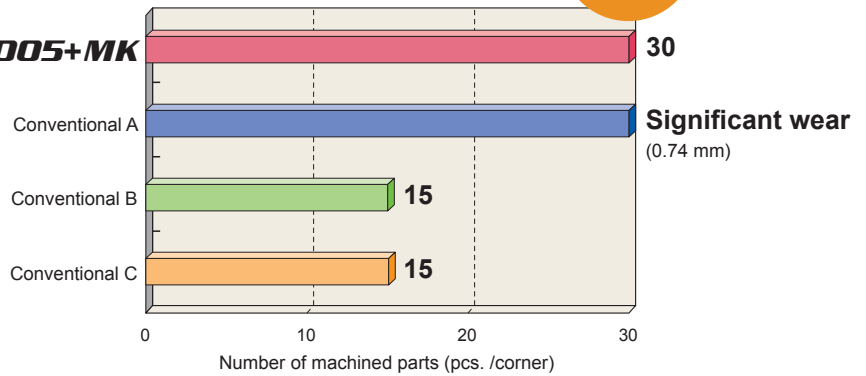

Double tool life

<Cutting conditions>


Work material : GGG70 ID and OD turning of Differential case
 Insert : WNMG080412-MK (MC5005)
 Cutting speed : 170-200 m/min
 Feed : 0.35-0.5 mm/rev
 Depth of cut : 1.5-2.0 mm
 Cutting mode : Wet Cutting

GGG70 Parts trial No.4


Substantial reduction of fracturing when machining thin walls



Wear 0.44 mm
After machining 17 pcs.

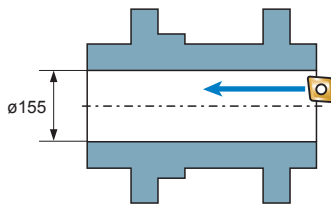

MC5015+MK





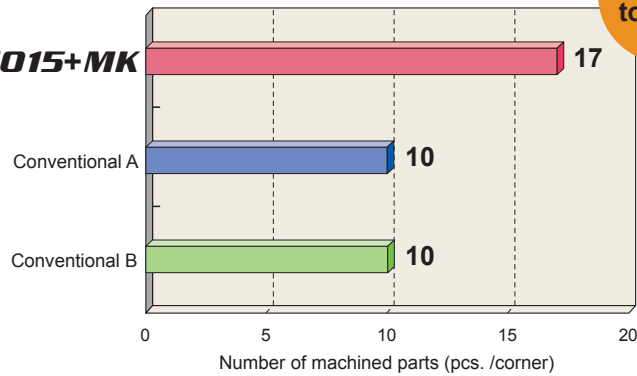


170 % tool life

<Cutting conditions>

Work material : GGG70 ID for case
 Insert : CNMG080412-MK (MC5015)
 Cutting speed : 120 m/min
 Feed : 0.1 mm/rev
 Depth of cut : Rough=4 mm, Finish=3 mm
 Cutting mode : Dry Cutting

Application Examples

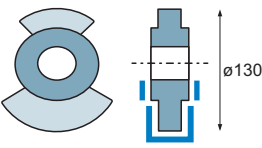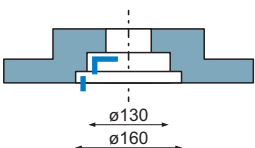Insert		WNMG080412-MK (MC5005)	CNMA120412(MC5015)
Work piece	Cast Iron FC250		Cast Iron FC200
	Counter weight	Brake disc	
Cutting conditions	Component	Counter weight	Brake disc
	Cutting speed (m/min)	400-500	650
	Feed (mm/rev)	0.20	0.3
Depth of cut (mm)	2.0	0.5	
Cutting mode		Wet cutting	Wet cutting
Results	Number of machined parts (pcs. /corner)	<p>50 100</p> <p>MC5005 77</p> <p>Conventional 50</p>	<p>200 400</p> <p>MC5015 385</p> <p>Conventional 120</p>
		When using high efficiency conditions, 1.5 times tool life was achieved.	Internal and face cutting gave 1.2 times tool life.
Insert		WNMA080412 (MC5015)	CNMG120408-MK (MC5015)
Work piece	Ductile Cast Iron FCD500		Ductile Cast Iron FCD600
	Differential case	Brake disc	
Cutting conditions	Component	Differential case	Brake disc
	Cutting speed (m/min)	350	80
	Feed (mm/rev)	0.47	0.35
Depth of cut (mm)	3.0	2.0-3.0	
Cutting mode		Wet cutting	Wet cutting
Results	Number of machined parts (pcs. /corner)	<p>50 100</p> <p>MC5015 75</p> <p>Conventional 60</p>	<p>100 200</p> <p>MC5015 130</p> <p>Conventional 80</p>
		No damage occurred during high speed roughing of material with scale.	External and face roughing gave 1.2 times tool life.
Insert		CNMG160616-RK (MC5015)	
Work piece	Ductile Cast Iron FCD600		
	Hub		
Cutting conditions	Component	Hub	
	Cutting speed (m/min)	250	
	Feed (mm/rev)	0.5	
Depth of cut (mm)	3.0-4.0		
Cutting mode		Wet cutting	
Results	Number of machined parts (pcs. /corner)	<p>25 50</p> <p>MC5015 40 Can continue machining</p> <p>Conventional 36</p>	
		Reduced wear meant an increase in the number of pieces machined per edge.	

New CVD coating for cast iron turning **MC5005/MC5015**



New chip breaker system for cast iron turning **LK/MK/RK**



www.mitsubishicarbide.com

MMC HARTMETALL GmbH

Comeniusstr. 2, 40670 Meerbusch, Germany
Tel. +49-2159-9189-0 Fax +49-2159-918966
e-mail admin@mmchg.de

MMC HARDMETAL U.K. LTD.

Mitsubishi House, Galena Close, Tamworth, Staffs. B77 4AS, U.K.
Tel. +44-1827-312312 Fax +44-1827-312314
e-mail sales@mitsubishicarbide.co.uk

MMC METAL FRANCE s.a.r.l.

6, Rue Jacques Monod, 91400 Orsay, France
Tel. +33-1-69 35 53 53 Fax +33-1-69 35 53 50
e-mail mmfsales@mmc-metal-france.fr

MITSUBISHI MATERIALS ESPAÑA, S.A.

Calle Emperador 2, 46136 Museros/Valencia, Spain
Tel. +34-96-144-1711 Fax +34-96-144-3786
e-mail mme@mmevalencia.com

MMC ITALIA S.r.l.

Via Montefeltro 6/A, 20156 Milano, Italy
Tel. +39-02 93 77 03 1 Fax +39-02 93 58 90 93
e-mail info@mmc-italia.it

MMC HARDMETAL POLAND SP. z o.o.

Al. Armii Krajowej 61, 50-541 Wrocław, Poland
Tel. +48-71335-16-20 Fax +48-71335-16-21
e-mail sales@mitsubishicarbide.com.pl

MMC HARDMETAL RUSSIA OOO LTD.

Electrozavodskaya Str. 24, build. 3 107023 r. Moscow, Russia
Tel. +7-495-725-58-85 Fax. +7-495-981-39-79
e-mail info@mmc-carbide.ru

MMC Hartmetall GmbH Almany - İzmir Merkez Şubesi

Adalet Mahallesi Anadolu Caddesi No: 41-1 / 15001 35580 Bayraklı/İzmir TURKY
Tel. +90 232 5015000 Fax +90-232-5015007
e-mail info@mmchg.com.tr