

MITSUBISHI

MITSUBISHI CARBIDE

B053E

New Threading Tools

MMT series



MMT series for precise and efficient threading

Series expanded, additional M-class inserts
with 3-D chip breakers`.

Tough new grade, ***VP15TF*** for G-class inserts



THREAD PITCH CROSS REFERENCE

Application		General machining				Pipe fittings and couplings for gas and water		
Type	Partial Profile 60°	Partial Profile 55°	ISO Metric	American UN	Parallel Pipe Thread Whitworth for BSW, BSP	American NPT		
Symbol	M UNC UNF	W	M	UNC UNF	G(PF)* W	NPT		
Holder	Pitch	mm (thread/inch)	thread/inch	mm	thread/inch	thread/inch		
MMT Holder 	Full form	—	—	0.5 2.5 0.75 3.0 1.0 3.5 1.25 4.0 1.5 4.5 1.75 5.0 2.0	32 12 28 11 24 10 20 9 18 8 16 7 14 6 13 5	28 11 26 10 20 9 19 8 18 7 16 6 14 5 12	27 18 14 11.5 8	
		—	—	MMT16ER [○] ISO-S P11 MMT [○] ER [○] ISO P13	MMT16ER [○] UN-S P11 MMT [○] ER [○] UN P15	MMT16ER [○] W-S P11 MMT [○] ER [○] W P15	MMT [○] ER [○] NPT P17	
	Partial form	0.5 -1.5(48-16) 1.75-3.0(14-8) 0.5 -3.0(48-8) 3.5 -5.0(7-5)	48-16 14-8 48-8 7-5	0.5 -1.5 1.75-3.0 0.5 -3.0 3.5 -5.0	48-16 14-8 48-8 7-5	—	—	—
		MMT16ER [○] 60-S P11 MMT [○] ER [○] 60 P13	MMT16ER [○] 55-S P11 MMT [○] ER [○] 55 P13	MMT [○] ER [○] 60 P13	MMT [○] ER [○] 60 P13	—	—	—
MMT Boring Bars 	Full form	—	—	0.5 2.5 0.75 3.0 1.0 3.5 1.25 4.0 1.5 4.5 1.75 5.0 2.0	32 12 28 11 24 10 20 9 18 8 16 7 14 6 13 5	28 11 26 10 20 9 19 8 18 7 16 6 14 5 12	27 18 14 11.5 8	
		—	—	MMT [○] IR [○] ISO-S P12 MMT [○] IR [○] ISO P14	MMT16IR [○] UN-S P12 MMT [○] IR [○] UN P16	MMT16IR [○] W-S P12 MMT [○] IR [○] W P16	MMT [○] IR [○] NPT P18	
	Partial form	0.5 -1.5(48-16) 1.75-3.0(14-8) 0.5 -3.0(48-8) 3.5 -5.0(7-5)	48-16 14-8 48-8 7-5	0.5 -1.5 1.75-3.0 0.5 -3.0 3.5 -5.0	48-16 14-8 48-8 7-5	—	—	—
		MMT16IR [○] 60-S P12 MMT [○] IR [○] 60 P14	MMT16IR [○] 55-S P12 MMT [○] IR [○] 55 P14	MMT [○] IR [○] 60 P14	MMT [○] IR [○] 60 P14	—	—	—

Steam, gas and water line pipes		Pipe couplings for food and fire fighting industries	Motion transmissions		Aircraft and aerospace	Oil and gas	
Taper Pipe Thread BSPT	American NPTF	Round DIN 405	ISO Trapezoidal 30°	American ACME	UNJ	API Buttress Casing	API Round Casing & Tubing
R.Rc(PT) Rp(PS)	NPTF	Rd	Tr (TM)	ACME (TW)	UNJ	BCSG	CSG LCSG
thread/inch	thread/inch	thread/inch	mm	thread/inch	thread/inch	thread/inch	thread/inch
28 19 14 11	27 18 14 11.5 8	10 8 6 4	1.5 2.0 3.0 4.0 5.0	12 10 8 6 5	32 16 28 14 24 12 20 10 18 8	5	10 8
MMT16ER○○○BSPT-S P11 MMT○○ER○○○BSPT P15	MMT○○ER○○○NPTF P17	MMT○○ER○○○RD P15	MMT○○ER○○○TR P17	MMT○○ER○○○ACME P17	MMT○○ER○○○UNJ P17	MMT22ER050APBU P17	MMT16ER○○○APRD P17
—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—
19 14 11	14 11.5 8	10 8 6 4	1.5 2.0 3.0 4.0 5.0	12 10 8 6 5	* —	5	10 8
MMT16IR○○○BSPT-S P12 MMT○○IR○○○BSPT P16	MMT○○IR○○○NPTF P18	MMT○○IR○○○RD P16	MMT○○IR○○○TR P18	MMT○○IR○○○ACME P18	—	MMT22IR050APBU P18	MMT16IR○○○APRD P18
—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—

Note) When machining an internal UNJ thread, cut an internal hole with the appropriate diameter. Then machine with 60° American UN.

Note) For Pipe Threads, the list above contains both new and old symbols. Symbols in brackets are the old type.
 R: Male Taper Thread, Rc: Female Taper Thread, Rp: Female Parallel Thread
 Female Parallel Thread defined with Rp(PS) is used for Male Taper Pipe Thread.
 It is different from Female Parallel Pipe Thread defined with G(PF).

M-class inserts with 3-D chip breakers

Features

● EXCELLENT CHIP CONTROL

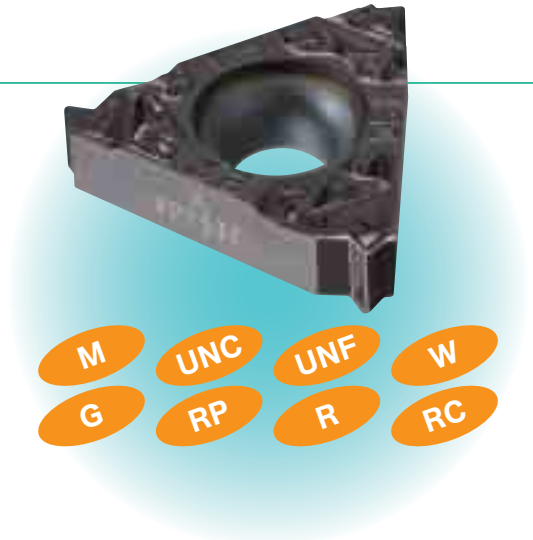
Latest chip breaker design improves efficiency by ensuring good chip control.

● PREVENTS VIBRATION AND BURRS

The new chip breaker allows smoother cutting to reduce vibration. Additionally, less tearing of the work material means less burrs.

● MOULDED IDENTIFICATION MARKS

The type and pitch of the insert is moulded onto the top of the insert for easy recognition of each thread type.





Cutting Performance

● Chip control comparison

ISO metric external thread pitch 1.5mm Final pass (6th pass)

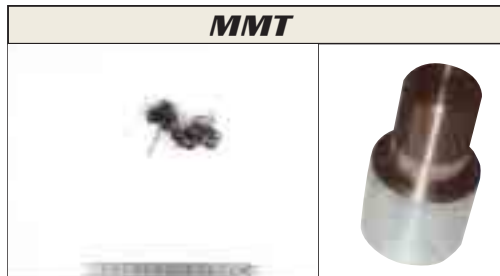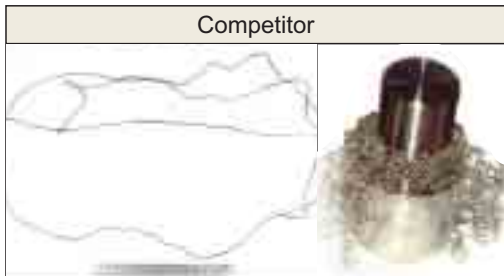Ideal chip control even in the latter half of passes when continuous chips are usually produced.



<Cutting conditions>
 Workpiece : Alloy steel
 Insert : MMT16ER150ISO-S
 Grade : VP15TF
 Cutting speed: 120m/min
 Cutting method: Radial infeed
 Depth of cut : Fixed cut area
 Pass : 6 times
 Coolant : WET

● Burr comparison

ISO metric external thread pitch 1.5mm
 (Enlarged views of incomplete threads at the initial stages of cutting)



Use of Mitsubishi's unique M-class sharp edge technology. The sharp edge eliminates burrs on incomplete threads.

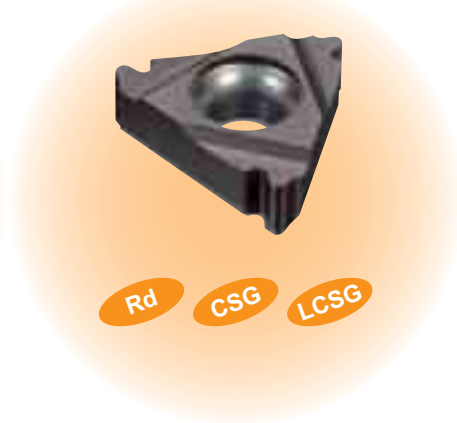
<Cutting conditions>
 Workpiece : 316 Stainless steel
 Insert : MMT16ER150ISO-S
 Grade : VP15TF
 Cutting speed: 100m/min
 Cutting method: Radial infeed
 Depth of cut : Fixed cut area
 Pass : 6 times
 Coolant : WET

G-class ground insert

Features

● A Wide Variety of Products

- Mitsubishi Miracle Threading (MMT) series. 193 inserts and 26 holders
- The MMT series allows a wide range of threading, from standard metric to threads for pipe couplings, gas and aerospace.



● A higher level of precision than conventional inserts.

- The following tolerances can be achieved with the MMT series.

Thread Type	Threading Tolerance
ISO Metric	6g / 6H
American UN	2A / 2B
Whitworth for BSW, BSP	Medium Class A
BSPT	Standard BSPT
Round DIN 405	7h / 7H
ISO Trapezoidal 30°	7e / 7H
American ACME	3G
UNJ	3A
API Buttress Casing	Standard API
API Rounded Casing & Tubing	Standard API RD
American NPT	Standard NPT
American NPTF	Class2

● Long Tool Life with a "Sharp" Cutting Edge

- A "sharp" cutting edge lengthens tool life.
- A "sharp" cutting edge can be achieved with a small and uniform honing along the entire cutting edge.









MMT series insert ("Sharp" cutting edge)



Competitor's insert

Insert selection

● Choosing M-class inserts with 3-D chip breakers or G-class inserts

Insert	Chip control	Precision of thread
G-class inserts 		
M-class inserts with 3-D chip breakers 		

- For ideal chip control and a high cost performance ratio, M-class inserts with 3-D chip breakers are recommended.
- G-class inserts are recommended where higher precision is required.

Features of **VP10MF** (G-class ground insert only)

Superior wear and plastic deformation resistance

- High wear and plastic deformation resistance for threading when maintaining the thread form is important. Suitable for continuous high precision machining with extensive tool life.
- Effective in combination with G-class inserts for high precision threading.

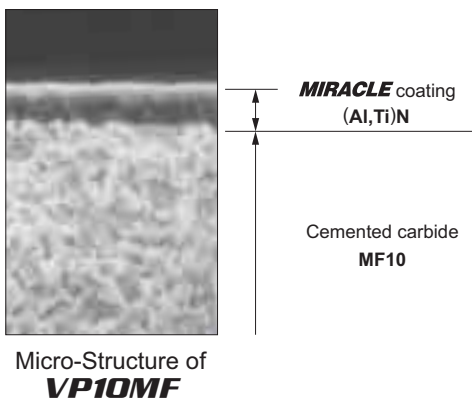
Features of **VP15TF** (G-class ground insert , M-class inserts with 3-D chip breakers)

Wide versatility


- High fracture resistance during low rigidity applications such as bar feed machining. Able to withstand harsh conditions for long periods where conventional inserts would be liable to breakage.
- Effective combination of high cost performance M-class inserts with 3-D chip breakers.

Features of **MIRACLE** coating

MIRACLE coating



MIRACLE coating features

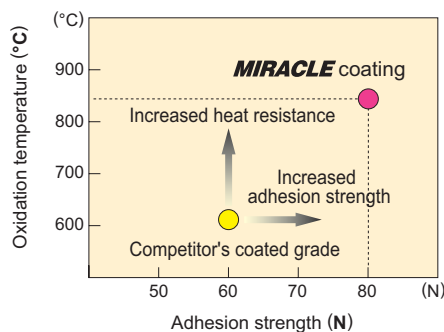

MIRACLE coating **VP10MF** and **VP15TF** displays high welding resistance, making it suitable for cutting mild steels, carbon steels, alloy steels, stainless steels and cast iron.

Longer tool life achieved with a combination of a reliable coating and a carbide substrate best suited for threading.

Grade markings on G-class inserts

An identifying mark printed on the side of the insert

G-class grinding inserts		
Grade	VP10MF	VP15TF
Insert underside		
	Grade name	Grade name

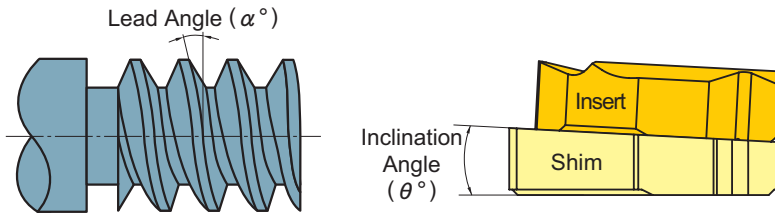
- **VP15TF**, G-class inserts have three dots embossed on the underside. (On the side "**VP15TF**" is printed.)
- **VP15TF**, G-class inserts have the grade name "**VP15TF**" printed on the side.

Note) M-class inserts with 3-D chip breakers have no dots, only the grade name marking.

Features of the new holders

Suitable for threading with a large lead angle.

- By changing only the shim, MMT holders can be used for turning of threads with various lead angles as well as the turning of left hand threads.
- Insert interference with the thread can be prevented to achieve a good surface finish.





Lead Angle (α°)	Inclination Angle (θ°)
-1.5°	-3°
-0.5°	-2°
0.5°	-1°
1.5°	0°
2.5°	1°
3.5°	2°
4.5°	3°

Delivered with the holder.

Internal threading holder with through coolant

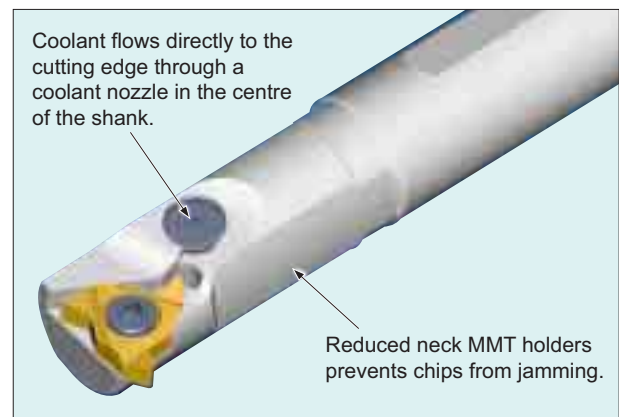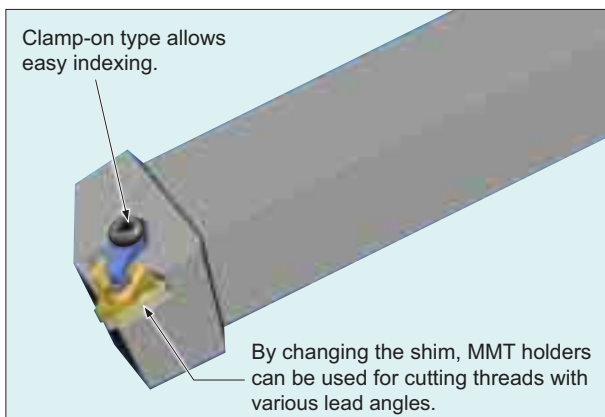- Efficient coolant supply to the cutting point lengthens the life of an insert.
- Smooth chip discharge, the key to efficient internal threading can be achieved.




Use of special surface treatment

- Higher corrosion and friction resistance and longer tool life than conventional products.

Greatly increased rigidity

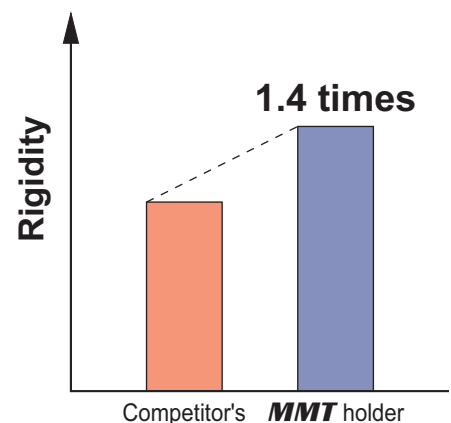- Small diameter internal threading holder achieved approximately 1.4 times higher rigidity than a conventional product.



New Threading Tools

Threading method		Right Hand Thread	Left Hand Thread
External			*Change the shim
Internal			*Change the shim

- Usually, threads are cut with the feed towards the chuck.
- When machining left hand threads, note that clamping rigidity is lowered due the application of back turning.
- When machining left hand threads, the lead angle is negative. Ensure an appropriate lead angle by changing the shim.

Insert type		
Partial Form	Full Form	Semi Full Form (Trapezoidal threads only)
<ul style="list-style-type: none"> ● The same insert can be used for a range of pitches. ● Shorter tool life because the nose radius of the insert is smaller than that of the wiper insert. ● Finishing with another operation is necessary. 	<ul style="list-style-type: none"> ● No de-burring needed after threading. ● Requires different threading inserts. 	<ul style="list-style-type: none"> ● No de-burring needed after threading. ● Requires different threading inserts. ● Finishing with another operation is necessary.

■ Pipe threads and tool selection

● Parallel Pipe Threads G(PF)

Thread Type	Number of threads	Standard internal diameter
G1/16	28	6.561
G1/8		8.556
G1/4	19	11.445
G3/8		14.950
G1/2	14	18.631
G5/8		20.587
G3/4		24.117
G7/8		27.877
G1	11	30.291
G1-1/8		34.939
G1-1/4		38.952

Note) Same as PF.

● Taper Pipe Threads R, Rc(PT)

Thread Type	Number of threads	Standard internal diameter
R1/16	28	6.561
R1/8		8.556
R1/4	19	11.445
R3/8		14.950
R1/2	14	18.631
—	—	—
R3/4	14	24.117
—	—	—
R1	11	30.291
—	—	—
R1-1/4	11	38.952

Note) Same as Rc and PT.

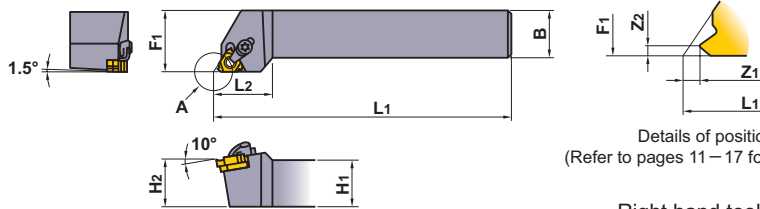

• The pitch is pre-determined for each nominal diameter. Note the minimum machining diameter especially when internal threading.

MMTE HOLDER

Holders

MMTE

External threading



Details of position A
(Refer to pages 11 – 17 for size Z1, Z2.)

Right hand tool holder only.


Order Number	Stock R	Insert Number	Dimensions (mm)					Clamp Bridge	Clamp Screw	Stop Ring	Shim Screw	Shim*	Wrench	
			H1	B	L1	L2	H2							F1
MMTER1212H16-C	●	MMT16ER ○○○○○	12	12	100	25	12	16	SETK51	SETS51	CR4	HFC03008	CTE32TP15	①TKY15F ②HKY20R
1616H16-C	●		16	16	100	25	16	20	SETK51	SETS51	CR4	HFC03008	CTE32TP15	①TKY15F ②HKY20R
2020K16-C	●		20	20	125	26	20	25	SETK51	SETS51	CR4	HFC03008	CTE32TP15	①TKY15F ②HKY20R
2525M16-C	●		25	25	150	28	25	32	SETK51	SETS51	CR4	HFC03008	CTE32TP15	①TKY15F ②HKY20R
3232P16-C	●		32	32	170	32	32	40	SETK51	SETS51	CR4	HFC03008	CTE32TP15	①TKY15F ②HKY20R
MMTER2525M22-C	●	MMT22ER ○○○○○	25	25	150	32	25	32	SETK61	SETS61	CR5	HFC04010	CTE43TP15	①TKY20F ②HKY25R
3232P22-C	●		32	32	170	32	32	40	SETK61	SETS61	CR5	HFC04010	CTE43TP15	①TKY20F ②HKY25R
4040R22-C	★		40	40	200	38	40	50	SETK61	SETS61	CR5	HFC04010	CTE43TP15	①TKY20F ②HKY25R

* Select and use a shim as shown below (sold separately), dependant on the lead angle.

Shim

Lead Angle (α°)	Order Number	Stock R	Inclination Angle (θ°)	Applicable Holder
-1.5°	CTE32TN15	●	-3°	MMTER ○○○○○ 16-C
-0.5°	N05	●	-2°	
0.5°	P05	●	-1°	
1.5°	P15	●	0°	
2.5°	P25	●	1°	
3.5°	P35	●	2°	
4.5°	P45	●	3°	

Standard shim delivered with the holder.



Identification

MMT	E	R	12	12	H	16	-C
Designation	Application E External	Hand of Tool R Right	Tool Size (mm) (Height and Width)		Tool Length (mm)	Diameter of Inscribed Circle (mm)	Method of Holding C Clamp-on
			12	12	H 100	16 9.525	
			16	16	K 125	22 12.7	
			20	20	M 150		
			25	25	P 170		
			32	32	R 200		
			40	40			

Recommended cutting conditions

Work Material	Hardness	Grade	Cutting Speed (m/min)
P Mild Steel	≤180HB	VP10MF	185 (140–230)
Carbon Steel Alloy Steel	180–280HB	VP10MF	150 (100–200)
M Stainless Steel	≤200HB	VP10MF	140 (100–180)
K Cast Iron	Tensile Strength ≤350N/mm ²	VP10MF	150 (100–200)


Work Material	Hardness	Grade	Cutting Speed (m/min)
S Heat-Resistant Alloy	–	VP10MF	45 (15–70)
Titanium Alloy	–	VP10MF	60 (40–80)
H Heat-Treated Alloy	45–55HRC	VP10MF	50 (30–70)

MMTI TYPE BORING BARS

Holders

MMTI

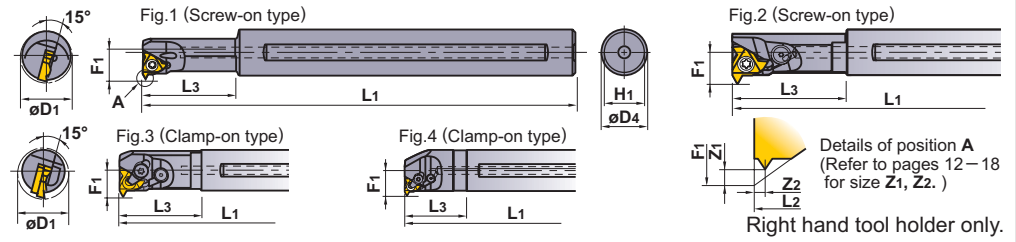Internal threading



Order Number	Stock R	Insert Number	Lead Angle	Dimensions (mm)					Min. Cutting Diameter (mm) D1	Accessories						Fig	
				D4	L1	L3	F1	H1		Clamp Bridge	Clamp Screw	Stop Ring	Shim Screw	Shim*	Wrench		
MMTIR1316AK11-SP15	●	MMT11IR	1.5°	16	125	25	8.7	15	13	—	TS25	—	—	—	①TKY08F	1	
1316AK11-SP25	★		2.5°	16	125	25	8.7	15	13	—	TS25	—	—	—	①TKY08F	1	
1316AK11-SP35	★		3.5°	16	125	25	8.7	15	13	—	TS25	—	—	—	①TKY08F	1	
1516AM11-SP15	●		1.5°	16	150	32	9.7	15	15	—	TS25	—	—	—	①TKY08F	1	
1516AM11-SP25	★		2.5°	16	150	32	9.7	15	15	—	TS25	—	—	—	①TKY08F	1	
1516AM11-SP35	★		3.5°	16	150	32	9.7	15	15	—	TS25	—	—	—	①TKY08F	1	
MMTIR1916AM16-SP15	●	MMT16IR	1.5°	16	150	40	12.2	15	19	—	CS350860T	—	—	—	①TKY15F	2	
1916AM16-SP25	★		2.5°	16	150	40	12.2	15	19	—	CS350860T	—	—	—	①TKY15F	2	
1916AM16-SP35	★		3.5°	16	150	40	12.2	15	19	—	CS350860T	—	—	—	①TKY15F	2	
2420AQ16-C	●		1.5°	20	180	40	14.2	19	24	24	SETK51	SETS51	CR4	HFC03006	CTI32TP15	①TKY15F ②HKY20R	3
2925AS16-C	●		1.5°	25	250	60	16.7	23.4	29	24	SETK51	SETS51	CR4	HFC03006	CTI32TP15	①TKY15F ②HKY20R	3
3732AS16-C	●		1.5°	32	250	48	20.5	30.4	37	24	SETK51	SETS51	CR4	HFC03006	CTI32TP15	①TKY15F ②HKY20R	4
MMTIR2420AQ22-SP15	●	MMT22IR	1.5°	20	180	50	15.5	19	24	—	TS43	—	—	—	①TKY15F	2	
2420AQ22-SP25	★		2.5°	20	180	50	15.5	19	24	—	TS43	—	—	—	①TKY15F	2	
2420AQ22-SP35	★		3.5°	20	180	50	15.5	19	24	—	TS43	—	—	—	①TKY15F	2	
3025AR22-C	●		1.5°	25	200	38	17.8	23.4	30	30	SETK61	SETS61	CR5	HFC04008	CTI43TP15	①TKY20F ②HKY25R	4
3832AS22-C	●		1.5°	32	250	48	21.8	30.4	38	30	SETK61	SETS61	CR5	HFC04008	CTI43TP15	①TKY20F ②HKY25R	4
4640AT22-C	★		1.5°	40	300	60	26.2	38	46	30	SETK61	SETS61	CR5	HFC04008	CTI43TP15	①TKY20F ②HKY25R	4


(Note) Select and use a shim as shown below (sold separately), dependant on the lead angle.

- A screw-on tool holder uses no shim. (The holder body has a lead angle.) Use a tool holder with the appropriate lead angle.
- Min. cutting diameter shows the internal hole diameter, not the thread diameter.

Shim


Lead Angle (α°)	Order Number	Stock R	Inclination Angle (θ°)	Applicable Holder
-1.5°	CTI32TN15	●	-3°	MMTIR ○16-C
-0.5°	N05	●	-2°	
0.5°	P05	●	-1°	
1.5°	P15	●	0°	
2.5°	P25	●	1°	
3.5°	P35	●	2°	
4.5°	P45	●	3°	

Lead Angle (α°)	Order Number	Stock R	Inclination Angle (θ°)	Applicable Holder
-1.5°	CTI43TN15	●	-3°	MMTIR ○22-C
-0.5°	N05	●	-2°	
0.5°	P05	●	-1°	
1.5°	P15	●	0°	
2.5°	P25	●	1°	
3.5°	P35	●	2°	
4.5°	P45	●	3°	



Standard shim delivered with the holder.

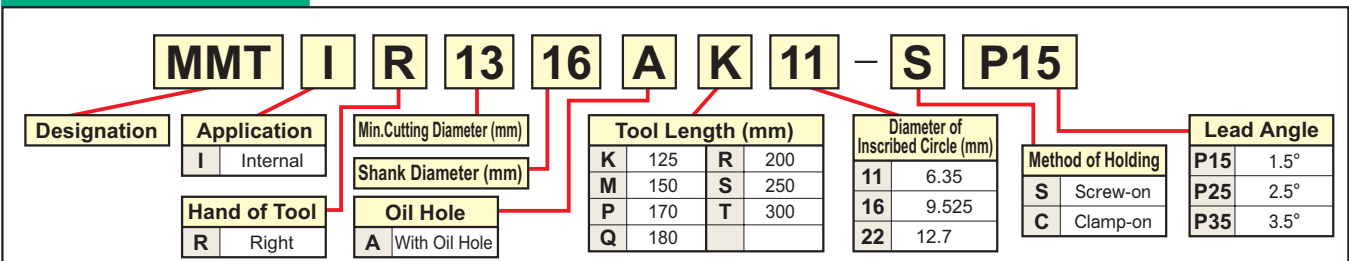Identification



MMT STANDARD FOR M-CLASS INSERTS WITH 3-D CHIP BREAKERS

NEW

External

Type	Order Number	Coated VP15TF	Pitch		Dimensions (mm)				Total Cutting Depth (mm)	Geometry
			mm	thread/inch	D1	S1	Z1	Z2		
Partial Profile 60°	MMT16ERA60-S	●	0.5–1.5	48–16	9.525	3.44	0.8	0.9	–	Partial form
	16ERG60-S	●	1.75–3.0	14–8	9.525	3.44	1.2	1.7	–	
Partial Profile 55°	MMT16ERA55-S	●		48–16	9.525	3.44	0.8	0.9	–	Partial form
	16ERG55-S	●		14–8	9.525	3.44	1.2	1.7	–	
ISO Metric	MMT16ER100ISO-S	●	1.0		9.525	3.44	0.7	0.7	0.61	Full form
	16ER125ISO-S	●	1.25		9.525	3.44	0.8	0.9	0.77	
	16ER150ISO-S	●	1.5		9.525	3.44	0.8	1.0	0.92	
	16ER175ISO-S	●	1.75		9.525	3.44	0.9	1.2	1.07	
	16ER200ISO-S	●	2.0		9.525	3.44	1.0	1.3	1.23	
	16ER250ISO-S	●	2.5		9.525	3.44	1.1	1.5	1.53	
American UN	MMT16ER160UN-S	●		16	9.525	3.44	0.9	1.1	0.97	Full form
	16ER140UN-S	●		14	9.525	3.44	1.0	1.2	1.11	
	16ER120UN-S	●		12	9.525	3.44	1.1	1.4	1.30	
Whitworth for BSW, BSP	MMT16ER190W-S	●		19	9.525	3.44	0.8	1.0	0.86	Full form
	16ER140W-S	●		14	9.525	3.44	1.0	1.2	1.16	
	16ER110W-S	●		11	9.525	3.44	1.1	1.5	1.48	
BSPT	MMT16ER190BSPT-S	●		19	9.525	3.44	0.8	0.9	0.86	Full form
	16ER140BSPT-S	●		14	9.525	3.44	1.0	1.2	1.16	
	16ER110BSPT-S	●		11	9.525	3.44	1.1	1.5	1.48	

Identification

MMT	16	E	R	050	ISO	-	S	S M-class inserts with 3-D chip breakers																																				
Designation	Diameter of Inscribed Circle (mm)	Application	Hand of Tool	Pitch	Threading Type																																							
	11 6.35 16 9.525	E External I Internal	R Right	<table border="1"> <tr> <td>100</td> <td>1.0mm</td> <td rowspan="2">A</td> <td rowspan="2">0.5–1.5mm or 48–16 thread/inch</td> </tr> <tr> <td>125</td> <td>1.25mm</td> </tr> <tr> <td>150</td> <td>1.5mm</td> <td rowspan="2">G</td> <td rowspan="2">1.75–3.0mm or 14–8 thread/inch</td> </tr> <tr> <td>175</td> <td>1.75mm</td> </tr> <tr> <td>200</td> <td>2.0mm</td> <td></td> <td></td> </tr> <tr> <td>250</td> <td>2.5mm</td> <td></td> <td></td> </tr> <tr> <td>300</td> <td>3.0mm</td> <td></td> <td></td> </tr> </table>	100	1.0mm	A	0.5–1.5mm or 48–16 thread/inch	125	1.25mm	150	1.5mm	G	1.75–3.0mm or 14–8 thread/inch	175	1.75mm	200	2.0mm			250	2.5mm			300	3.0mm			<table border="1"> <tr> <td>60</td> <td>Partial Profile 60°</td> </tr> <tr> <td>55</td> <td>Partial Profile 55°</td> </tr> <tr> <td>ISO</td> <td>ISO Metric</td> </tr> <tr> <td>W</td> <td>Whitworth for BSW, BSP</td> </tr> <tr> <td>BSPT</td> <td>BSPT</td> </tr> <tr> <td>UN</td> <td>American UN</td> </tr> </table>	60	Partial Profile 60°	55	Partial Profile 55°	ISO	ISO Metric	W	Whitworth for BSW, BSP	BSPT	BSPT	UN	American UN			
100	1.0mm	A	0.5–1.5mm or 48–16 thread/inch																																									
125	1.25mm																																											
150	1.5mm	G	1.75–3.0mm or 14–8 thread/inch																																									
175	1.75mm																																											
200	2.0mm																																											
250	2.5mm																																											
300	3.0mm																																											
60	Partial Profile 60°																																											
55	Partial Profile 55°																																											
ISO	ISO Metric																																											
W	Whitworth for BSW, BSP																																											
BSPT	BSPT																																											
UN	American UN																																											

Internal

Type	Order Number	Coated VP15TF	Pitch		Dimensions (mm)				Total Cutting Depth (mm)	Geometry
			mm	thread/inch	D1	S1	Z1	Z2		
Partial Profile 60°	MMT11IRA60-S	●	0.5-1.5	48-16	6.35	3.04	0.8	0.9	—	Partial form
	16IRA60-S	●	0.5-1.5	48-16	9.525	3.44	0.8	0.9	—	
	16IRG60-S	●	1.75-3.0	14-8	9.525	3.44	1.2	1.7	—	
Partial Profile 55°	MMT11IRA55-S	●		48-16	6.35	3.04	0.8	0.9	—	Partial form
	16IRA55-S	●		48-16	9.525	3.44	0.8	0.9	—	
	16IRG55-S	●		14-8	9.525	3.44	1.2	1.7	—	
ISO Metric	MMT11IR100ISO-S	●	1.0		6.35	3.04	0.6	0.7	0.58	Full form
	11IR125ISO-S	●	1.25		6.35	3.04	0.8	0.9	0.72	
	11IR150ISO-S	●	1.5		6.35	3.04	0.8	1.0	0.87	
	16IR100ISO-S	●	1.0		9.525	3.44	0.6	0.7	0.58	
	16IR125ISO-S	●	1.25		9.525	3.44	0.8	0.9	0.72	
	16IR150ISO-S	●	1.5		9.525	3.44	0.8	1.0	0.87	
	16IR175ISO-S	●	1.75		9.525	3.44	0.9	1.2	1.01	
	16IR200ISO-S	●	2.0		9.525	3.44	1.0	1.3	1.15	
	16IR250ISO-S	●	2.5		9.525	3.44	1.1	1.5	1.44	
	16IR300ISO-S	●	3.0		9.525	3.44	1.1	1.5	1.73	
American UN	MMT16IR160UN-S	●		16	9.525	3.44	0.9	1.1	0.92	Full form
	16IR140UN-S	●		14	9.525	3.44	0.9	1.2	1.05	
	16IR120UN-S	●		12	9.525	3.44	1.1	1.4	1.22	
Whitworth for BSW, BSP	MMT16IR190W-S	●		19	9.525	3.44	0.8	1.0	0.86	Full form
	16IR140W-S	●		14	9.525	3.44	1.0	1.2	1.16	
	16IR110W-S	●		11	9.525	3.44	1.1	1.5	1.48	
BSPT	MMT16IR190BSPT-S	●		19	9.525	3.44	0.8	0.9	0.86	Full form
	16IR140BSPT-S	●		14	9.525	3.44	1.0	1.2	1.16	
	16IR110BSPT-S	●		11	9.525	3.44	1.1	1.5	1.48	

MMT STANDARDS FOR G-CLASS GROUND INSERTS

External

Type	Thread Tolerance	Order Number	Insert Tolerance	Coated		Pitch		Dimensions (mm)				Total Cutting Depth (mm)	Geometry
				VP10MF	VP15TF			D1	S1	Z1	Z2		
				mm	thread/inch								
Partial Profile 60°	—	MMT16ERA60	G	●	●	0.5–1.5	48–16	9.525	3.44	0.8	0.9	—	Partial form
		16ERG60	G	●	●	1.75–3.0	14–8	9.525	3.44	1.2	1.7	—	
		16ERAG60	G	●	●	0.5–3.0	48–8	9.525	3.44	1.2	1.7	—	
		22ERN60	G	●	●	3.5–5.0	7–5	12.7	4.64	1.7	2.5	—	
Partial Profile 55°	—	MMT16ERA55	G	●	●		48–16	9.525	3.44	0.8	0.9	—	Partial form
		16ERG55	G	●	●		14–8	9.525	3.44	1.2	1.7	—	
		16ERAG55	G	●	●		48–8	9.525	3.44	1.2	1.7	—	
		22ERN55	G	●	●		7–5	12.7	4.64	1.7	2.5	—	
ISO Metric	6g	MMT16ER050ISO	G	●	●	0.5		9.525	3.44	0.6	0.4	0.31	Full form
		16ER075ISO	G	●	●	0.75		9.525	3.44	0.6	0.6	0.46	
		16ER100ISO	G	●	●	1.0		9.525	3.44	0.7	0.7	0.61	
		16ER125ISO	G	●	●	1.25		9.525	3.44	0.8	0.9	0.77	
		16ER150ISO	G	●	●	1.5		9.525	3.44	0.8	1.0	0.92	
		16ER175ISO	G	●	●	1.75		9.525	3.44	0.9	1.2	1.07	
		16ER200ISO	G	●	●	2.0		9.525	3.44	1.0	1.3	1.23	
		16ER250ISO	G	●	●	2.5		9.525	3.44	1.1	1.5	1.53	
		16ER300ISO	G	●	●	3.0		9.525	3.44	1.2	1.6	1.84	
		22ER350ISO	G	●	●	3.5		12.7	4.64	1.6	2.3	2.15	
		22ER400ISO	G	●	●	4.0		12.7	4.64	1.6	2.3	2.45	
		22ER450ISO	G	●	●	4.5		12.7	4.64	1.7	2.4	2.76	
22ER500ISO	G	●	●	5.0		12.7	4.64	1.7	2.5	3.07			

Identification





MMT	16	E	R	050	ISO																																																																
Designation	Diameter of Inscribed Circle (mm)	Application	Hand of Tool	Pitch	Threading Type																																																																
	11 6.35 16 9.525 22 12.7	E External I Internal	R Right	<table border="1"> <tr> <td>050</td> <td>0.5mm</td> <td rowspan="3">A</td> <td rowspan="3">0.5–1.5mm or 48–16 thread/inch</td> </tr> <tr> <td>075</td> <td>0.75mm</td> </tr> <tr> <td>100</td> <td>1.0mm</td> </tr> <tr> <td>125</td> <td>1.25mm</td> <td rowspan="3">G</td> <td rowspan="3">1.75–3.0mm or 14–8 thread/inch</td> </tr> <tr> <td>150</td> <td>1.5mm</td> </tr> <tr> <td>175</td> <td>1.75mm</td> </tr> <tr> <td>200</td> <td>2.0mm</td> <td rowspan="3">AG</td> <td rowspan="3">0.5–3.0mm or 48–8 thread/inch</td> </tr> <tr> <td>250</td> <td>2.5mm</td> </tr> <tr> <td>300</td> <td>3.0mm</td> </tr> <tr> <td>350</td> <td>3.5mm</td> <td rowspan="3">N</td> <td rowspan="3">3.5–5.0mm or 7–5 thread/inch</td> </tr> <tr> <td>400</td> <td>4.0mm</td> </tr> <tr> <td>450</td> <td>4.5mm</td> </tr> <tr> <td>500</td> <td>5.0mm</td> <td></td> <td></td> </tr> </table>	050	0.5mm	A	0.5–1.5mm or 48–16 thread/inch	075	0.75mm	100	1.0mm	125	1.25mm	G	1.75–3.0mm or 14–8 thread/inch	150	1.5mm	175	1.75mm	200	2.0mm	AG	0.5–3.0mm or 48–8 thread/inch	250	2.5mm	300	3.0mm	350	3.5mm	N	3.5–5.0mm or 7–5 thread/inch	400	4.0mm	450	4.5mm	500	5.0mm			<table border="1"> <tr> <td>60</td> <td>Partial Profile 60°</td> </tr> <tr> <td>55</td> <td>Partial Profile 55°</td> </tr> <tr> <td>ISO</td> <td>ISO Metric</td> </tr> <tr> <td>W</td> <td>Whitworth for BSW, BSP</td> </tr> <tr> <td>BSPT</td> <td>BSPT</td> </tr> <tr> <td>UN</td> <td>American UN</td> </tr> <tr> <td>RD</td> <td>Round DIN 405</td> </tr> <tr> <td>TR</td> <td>ISO Trapezoidal 30°</td> </tr> <tr> <td>ACME</td> <td>American ACME</td> </tr> <tr> <td>UNJ</td> <td>UNJ</td> </tr> <tr> <td>APBU</td> <td>API Buttress Casing</td> </tr> <tr> <td>APRD</td> <td>API Round Casing & Tubing</td> </tr> <tr> <td>NPT</td> <td>NPT</td> </tr> <tr> <td>NPTF</td> <td>NPTF</td> </tr> </table>	60	Partial Profile 60°	55	Partial Profile 55°	ISO	ISO Metric	W	Whitworth for BSW, BSP	BSPT	BSPT	UN	American UN	RD	Round DIN 405	TR	ISO Trapezoidal 30°	ACME	American ACME	UNJ	UNJ	APBU	API Buttress Casing	APRD	API Round Casing & Tubing	NPT	NPT	NPTF	NPTF
050	0.5mm	A	0.5–1.5mm or 48–16 thread/inch																																																																		
075	0.75mm																																																																				
100	1.0mm																																																																				
125	1.25mm	G	1.75–3.0mm or 14–8 thread/inch																																																																		
150	1.5mm																																																																				
175	1.75mm																																																																				
200	2.0mm	AG	0.5–3.0mm or 48–8 thread/inch																																																																		
250	2.5mm																																																																				
300	3.0mm																																																																				
350	3.5mm	N	3.5–5.0mm or 7–5 thread/inch																																																																		
400	4.0mm																																																																				
450	4.5mm																																																																				
500	5.0mm																																																																				
60	Partial Profile 60°																																																																				
55	Partial Profile 55°																																																																				
ISO	ISO Metric																																																																				
W	Whitworth for BSW, BSP																																																																				
BSPT	BSPT																																																																				
UN	American UN																																																																				
RD	Round DIN 405																																																																				
TR	ISO Trapezoidal 30°																																																																				
ACME	American ACME																																																																				
UNJ	UNJ																																																																				
APBU	API Buttress Casing																																																																				
APRD	API Round Casing & Tubing																																																																				
NPT	NPT																																																																				
NPTF	NPTF																																																																				

Internal

Type	Thread Tolerance	Order Number	Insert Tolerance	Coated		Pitch		Dimensions (mm)				Total Cutting Depth (mm)	Geometry
				VP10MF	VP15TF			D1	S1	Z1	Z2		
						mm	thread/inch						
Partial Profile 60°	—	MMT11IRA60	G	●	●	0.5-1.5	48-16	6.35	3.04	0.8	0.9	—	Partial form
		16IRA60	G	●	●	0.5-1.5	48-16	9.525	3.44	0.8	0.9	—	
		16IRG60	G	●	●	1.75-3.0	14-8	9.525	3.44	1.2	1.7	—	
		16IRAG60	G	●	●	0.5-3.0	48-8	9.525	3.44	1.2	1.7	—	
		22IRN60	G	●	●	3.5-5.0	7-5	12.7	4.64	1.7	2.5	—	
Partial Profile 55°	—	MMT11IRA55	G	●	●		48-16	6.35	3.04	0.8	0.9	—	Partial form
		16IRA55	G	●	●		48-16	9.525	3.44	0.8	0.9	—	
		16IRG55	G	●	●		14-8	9.525	3.44	1.2	1.7	—	
		16IRAG55	G	●	●		48-8	9.525	3.44	1.2	1.7	—	
		22IRN55	G	●	●		7-5	12.7	4.64	1.7	2.5	—	
ISO Metric	6H	MMT11IR050ISO	G	●	●	0.5		6.35	3.04	0.6	0.4	0.29	Full form
		11IR075ISO	G	●	●	0.75		6.35	3.04	0.6	0.6	0.43	
		11IR100ISO	G	●	●	1.0		6.35	3.04	0.6	0.7	0.58	
		11IR125ISO	G	●	●	1.25		6.35	3.04	0.8	0.9	0.72	
		11IR150ISO	G	●	●	1.5		6.35	3.04	0.8	1.0	0.87	
		11IR175ISO	G	●	●	1.75		6.35	3.04	0.9	1.1	1.01	
		11IR200ISO	G	●	●	2.0		6.35	3.04	0.9	1.1	1.15	
		16IR050ISO	G	●	●	0.5		9.525	3.44	0.6	0.4	0.29	
		16IR075ISO	G	●	●	0.75		9.525	3.44	0.6	0.6	0.43	
		16IR100ISO	G	●	●	1.0		9.525	3.44	0.6	0.7	0.58	
		16IR125ISO	G	●	●	1.25		9.525	3.44	0.8	0.9	0.72	
		16IR150ISO	G	●	●	1.5		9.525	3.44	0.8	1.0	0.87	
		16IR175ISO	G	●	●	1.75		9.525	3.44	0.9	1.2	1.01	
		16IR200ISO	G	●	●	2.0		9.525	3.44	1.0	1.3	1.15	
		16IR250ISO	G	●	●	2.5		9.525	3.44	1.1	1.5	1.44	
		16IR300ISO	G	●	●	3.0		9.525	3.44	1.1	1.5	1.73	
		22IR350ISO	G	●	●	3.5		12.7	4.64	1.6	2.3	2.02	
22IR400ISO	G	●	●	4.0		12.7	4.64	1.6	2.3	2.31			
22IR450ISO	G	●	●	4.5		12.7	4.64	1.6	2.4	2.60			
22IR500ISO	G	●	●	5.0		12.7	4.64	1.6	2.3	2.89			

MMT STANDARDS FOR G-CLASS GROUND INSERTS

External

Type	Thread Tolerance	Order Number	Insert Tolerance	Coated		Pitch		Dimensions (mm)				Total Cutting Depth (mm)	Geometry	
				VP10MF	VP15TF	NEW	mm	thread/inch	D1	S1	Z1			Z2
American UN	2A	MMT16ER320UN	G	●			32	9.525	3.44	0.6	0.6	0.49	Full form 	
		16ER280UN	G	●			28	9.525	3.44	0.6	0.7	0.56		
		16ER240UN	G	●			24	9.525	3.44	0.7	0.8	0.65		
		16ER200UN	G	●			20	9.525	3.44	0.8	0.9	0.78		
		16ER180UN	G	●			18	9.525	3.44	0.8	1.0	0.87		
		16ER160UN	G	●	●		16	9.525	3.44	0.9	1.1	0.97		
		16ER140UN	G	●	●		14	9.525	3.44	1.0	1.2	1.11		
		16ER130UN	G	●			13	9.525	3.44	1.0	1.3	1.20		
		16ER120UN	G	●	●		12	9.525	3.44	1.1	1.4	1.30		
		16ER110UN	G	●			11	9.525	3.44	1.1	1.5	1.42		
		16ER100UN	G	●			10	9.525	3.44	1.1	1.5	1.56		
		16ER090UN	G	●			9	9.525	3.44	1.2	1.7	1.73		
		16ER080UN	G	●			8	9.525	3.44	1.2	1.6	1.95		
		22ER070UN	G	●			7	12.7	4.64	1.6	2.3	2.22		
22ER060UN	G	●			6	12.7	4.64	1.6	2.3	2.60				
22ER050UN	G	●			5	12.7	4.64	1.7	2.5	3.12				
Whitworth for BSW, BSP	Medium Class A	MMT16ER280W	G	●			28	9.525	3.44	0.6	0.7	0.58	Full form 	
		16ER260W	G	●			26	9.525	3.44	0.7	0.8	0.63		
		16ER200W	G	●			20	9.525	3.44	0.8	0.9	0.81		
		16ER190W	G	●	●		19	9.525	3.44	0.8	1.0	0.86		
		16ER180W	G	●			18	9.525	3.44	0.8	1.0	0.90		
		16ER160W	G	●			16	9.525	3.44	0.9	1.1	1.02		
		16ER140W	G	●	●		14	9.525	3.44	1.0	1.2	1.16		
		16ER120W	G	●			12	9.525	3.44	1.1	1.4	1.36		
		16ER110W	G	●	●		11	9.525	3.44	1.1	1.5	1.48		
		16ER100W	G	●			10	9.525	3.44	1.1	1.5	1.63		
		16ER090W	G	●			9	9.525	3.44	1.2	1.7	1.81		
		16ER080W	G	●			8	9.525	3.44	1.2	1.5	2.03		
		22ER070W	G	●			7	12.7	4.64	1.6	2.3	2.32		
		22ER060W	G	●			6	12.7	4.64	1.6	2.3	2.71		
22ER050W	G	●			5	12.7	4.64	1.7	2.4	3.25				
BSPT	Standard BSPT	MMT16ER280BSPT	G	●			28	9.525	3.44	0.6	0.6	0.58	Full form 	
		16ER190BSPT	G	●	●		19	9.525	3.44	0.8	0.9	0.86		
		16ER140BSPT	G	●	●		14	9.525	3.44	1.0	1.2	1.16		
		16ER110BSPT	G	●	●		11	9.525	3.44	1.1	1.5	1.48		
Round DIN 405	7h	MMT16ER100RD	G	●			10	9.525	3.44	1.1	1.2	1.27	Full form 	
		16ER080RD	G	●			8	9.525	3.44	1.4	1.3	1.59		
		16ER060RD	G	●			6	9.525	3.44	1.5	1.7	2.12		
		22ER040RD	G	●			4	9.525	3.44	2.2	2.3	3.18		

Internal

Type	Thread Tolerance	Order Number	Insert Tolerance	Coated		Pitch		Dimensions (mm)				Total Cutting Depth (mm)	Geometry	
				VP10MF	VP15TF	NEW	mm	thread/inch	D1	S1	Z1			Z2
American UN	2B	MMT11IR320UN	G	●			32	6.35	3.04	0.6	0.6	0.46	Full form 	
		11IR280UN	G	●			28	6.35	3.04	0.6	0.7	0.52		
		11IR240UN	G	●			24	6.35	3.04	0.7	0.8	0.61		
		11IR200UN	G	●			20	6.35	3.04	0.8	0.9	0.73		
		11IR180UN	G	●			18	6.35	3.04	0.8	1.0	0.81		
		11IR160UN	G	●			16	6.35	3.04	0.9	1.1	0.92		
		11IR140UN	G	●			14	6.35	3.04	0.9	1.1	1.05		
		16IR320UN	G	●			32	9.525	3.44	0.6	0.6	0.46		
		16IR280UN	G	●			28	9.525	3.44	0.6	0.7	0.52		
		16IR240UN	G	●			24	9.525	3.44	0.7	0.8	0.61		
		16IR200UN	G	●			20	9.525	3.44	0.8	0.9	0.73		
		16IR180UN	G	●			18	9.525	3.44	0.8	1.0	0.81		
		16IR160UN	G	●	●		16	9.525	3.44	0.9	1.1	0.92		
		16IR140UN	G	●	●		14	9.525	3.44	0.9	1.2	1.05		
		16IR130UN	G	●	●		13	9.525	3.44	1.0	1.3	1.13		
		16IR120UN	G	●	●		12	9.525	3.44	1.1	1.4	1.22		
		16IR110UN	G	●			11	9.525	3.44	1.1	1.5	1.33		
		16IR100UN	G	●			10	9.525	3.44	1.1	1.5	1.47		
		16IR090UN	G	●			9	9.525	3.44	1.2	1.7	1.63		
		16IR080UN	G	●			8	9.525	3.44	1.1	1.5	1.83		
		22IR070UN	G	●			7	12.7	4.64	1.6	2.3	2.09		
		22IR060UN	G	●			6	12.7	4.64	1.6	2.3	2.44		
22IR050UN	G	●			5	12.7	4.64	1.6	2.3	2.93				
Whitworth for BSW, BSP	Medium Class A	MMT11IR190W	G	●			19	6.35	3.04	0.8	1.0	0.86	Full form 	
		11IR140W	G	●			14	6.35	3.04	0.9	1.1	1.16		
		16IR280W	G	●			28	9.525	3.44	0.6	0.7	0.58		
		16IR260W	G	●			26	9.525	3.44	0.7	0.8	0.63		
		16IR200W	G	●			20	9.525	3.44	0.8	0.9	0.81		
		16IR190W	G	●	●		19	9.525	3.44	0.8	1.0	0.86		
		16IR180W	G	●			18	9.525	3.44	0.8	1.0	0.90		
		16IR160W	G	●			16	9.525	3.44	0.9	1.1	1.02		
		16IR140W	G	●	●		14	9.525	3.44	1.0	1.2	1.16		
		16IR120W	G	●	●		12	9.525	3.44	1.1	1.4	1.36		
		16IR110W	G	●	●		11	9.525	3.44	1.1	1.5	1.48		
		16IR100W	G	●			10	9.525	3.44	1.1	1.5	1.63		
		16IR090W	G	●			9	9.525	3.44	1.2	1.7	1.81		
		16IR080W	G	●			8	9.525	3.44	1.2	1.5	2.03		
		22IR070W	G	●			7	12.7	4.64	1.6	2.3	2.32		
		22IR060W	G	●			6	12.7	4.64	1.6	2.3	2.71		
		22IR050W	G	●			5	12.7	4.64	1.7	2.4	3.25		
BSPT	Standard BSPT	MMT11IR190BSPT	G	●			19	6.35	3.04	0.8	0.9	0.86	Full form 	
		11IR140BSPT	G	●			14	6.35	3.04	0.9	1.0	1.16		
		16IR190BSPT	G	●	●		19	9.525	3.44	0.8	0.9	0.86		
		16IR140BSPT	G	●	●		14	9.525	3.44	1.0	1.2	1.16		
		16IR110BSPT	G	●	●		11	9.525	3.44	1.1	1.5	1.48		
Round DIN 405	7H	MMT16IR100RD	G	●			10	9.525	3.44	1.1	1.2	1.27	Full form 	
		16IR080RD	G	●			8	9.525	3.44	1.4	1.4	1.59		
		16IR060RD	G	●			6	9.525	3.44	1.4	1.5	2.12		
		22IR040RD	G	●			4	12.7	4.64	2.2	2.3	3.18		

MMT STANDARDS FOR G-CLASS GROUND INSERTS

External





Type	Thread Tolerance	Order Number	Insert Tolerance	Coated VP10MF	Pitch		Dimensions (mm)				Total Cutting Depth (mm)	Geometry
					mm	thread/inch	D1	S1	Z1	Z2		
ISO Trapezoidal 30°	7e	MMT16ER150TR	G	●	1.5		9.525	3.44	1.0	1.1	0.90	Semi-full form
		16ER200TR	G	●	2.0		9.525	3.44	1.1	1.3	1.25	
		16ER300TR	G	●	3.0		9.525	3.44	1.3	1.5	1.75	
		22ER400TR	G	●	4.0		12.7	4.64	1.7	1.9	2.25	
		22ER500TR	G	●	5.0		12.7	4.64	2.1	2.5	2.75	
American ACME	3G	MMT16ER120ACME	G	●		12	9.525	3.44	1.1	1.2	1.19	Semi-full form
		16ER100ACME	G	●		10	9.525	3.44	1.3	1.4	1.52	
		16ER080ACME	G	●		8	9.525	3.44	1.4	1.5	1.84	
		22ER060ACME	G	●		6	12.7	4.64	1.8	2.1	2.37	
		22ER050ACME	G	●		5	12.7	4.64	2.0	2.3	2.79	
UNJ	3A	MMT16ER320UNJ	G	●		32	9.525	3.44	0.6	0.7	0.46	Full form
		16ER280UNJ	G	●		28	9.525	3.44	0.7	0.7	0.52	
		16ER240UNJ	G	●		24	9.525	3.44	0.7	0.8	0.61	
		16ER200UNJ	G	●		20	9.525	3.44	0.8	0.9	0.73	
		16ER180UNJ	G	●		18	9.525	3.44	0.8	1.0	0.81	
		16ER160UNJ	G	●		16	9.525	3.44	0.9	1.1	0.92	
		16ER140UNJ	G	●		14	9.525	3.44	1.0	1.2	1.05	
		16ER120UNJ	G	●		12	9.525	3.44	1.1	1.3	1.22	
		16ER100UNJ	G	●		10	9.525	3.44	1.2	1.5	1.47	
16ER080UNJ	G	●		8	9.525	3.44	1.2	1.6	1.83			
API Buttress Casing	Standard API	MMT22ER050APBU	G	●		5	12.7	4.64	3.1	1.9	1.55	Full form
API Round Casing & Tubing	Standard API RD	MMT16ER100APRD	G	●		10	9.525	3.44	1.2	1.4	1.41	Full form
		16ER080APRD	G	●		8	9.525	3.44	1.3	1.5	1.81	
American NPT	Standard NPT	MMT16ER270NPT	G	●		27	9.525	3.44	0.7	0.8	0.66	Full form
		16ER180NPT	G	●		18	9.525	3.44	0.8	1.0	1.01	
		16ER140NPT	G	●		14	9.525	3.44	0.9	1.2	1.33	
		16ER115NPT	G	●		11.5	9.525	3.44	1.1	1.5	1.64	
		16ER080NPT	G	●		8	9.525	3.44	1.3	1.8	2.42	
American NPTF	Class 2	MMT16ER270NPTF	G	●		27	9.525	3.44	0.7	0.8	0.64	Full form
		16ER180NPTF	G	●		18	9.525	3.44	0.8	1.0	1.00	
		16ER140NPTF	G	●		14	9.525	3.44	0.9	1.2	1.35	
		16ER115NPTF	G	●		11.5	9.525	3.44	1.1	1.5	1.63	
		16ER080NPTF	G	●		8	9.525	3.44	1.3	1.8	2.38	

Internal



Type	Thread Tolerance	Order Number	Insert Tolerance	Coated		Pitch		Dimensions (mm)				Total Cutting Depth (mm)	Geometry
				VP10MF		mm	thread/inch	D1	S1	Z1	Z2		
ISO Trapezoidal 30°	7H	MMT16IR150TR	G	●	1.5		9.525	3.44	1.0	1.1	0.90		
		16IR200TR	G	●	2.0		9.525	3.44	1.1	1.3	1.25		
		16IR300TR	G	●	3.0		9.525	3.44	1.3	1.5	1.75		
		22IR400TR	G	●	4.0		12.7	4.64	1.7	1.9	2.25		
		22IR500TR	G	●	5.0		12.7	4.64	2.1	2.5	2.75		
American ACME	3G	MMT16IR120ACME	G	●		12	9.525	3.44	1.2	1.3	1.19		
		16IR100ACME	G	●		10	9.525	3.44	1.2	1.3	1.52		
		16IR080ACME	G	●		8	9.525	3.44	1.4	1.5	1.84		
		22IR060ACME	G	●		6	12.7	4.64	1.8	2.1	2.37		
		22IR050ACME	G	●		5	12.7	4.64	2.0	2.3	2.79		
UNJ		When machining an internal UNJ thread, cut an internal hole with the appropriate diameter. Then machine with 60° American UN. In this case, a full form type insert cannot be used.											
API Buttress Casing	Standard API	MMT22IR050APBU	G	●		5	12.7	4.64	2.8	1.9	1.55		
API Round Casing & Tubing	Standard API RD	MMT16IR100APRD	G	●		20	9.525	3.44	1.2	1.4	1.41		
		16IR080APRD	G	●		8	9.525	3.44	1.3	1.5	1.81		
American NPT	Standard NPT	MMT16IR270NPT	G	●		27	9.525	3.44	0.7	0.8	0.66		
		16IR180NPT	G	●		18	9.525	3.44	0.8	1.0	1.01		
		16IR140NPT	G	●		14	9.525	3.44	0.9	1.2	1.33		
		16IR115NPT	G	●		11.5	9.525	3.44	1.1	1.5	1.64		
		16IR080NPT	G	●		8	9.525	3.44	1.3	1.8	2.42		
American NPTF	Class 2	MMT16IR140NPTF	G	●		14	9.525	3.44	0.9	1.2	1.35		
		16IR115NPTF	G	●		11.5	9.525	3.44	1.1	1.5	1.63		
		16IR080NPTF	G	●		8	9.525	3.44	1.3	1.8	2.38		

Recommended Cutting Methods and Conditions

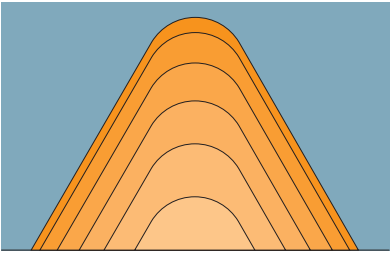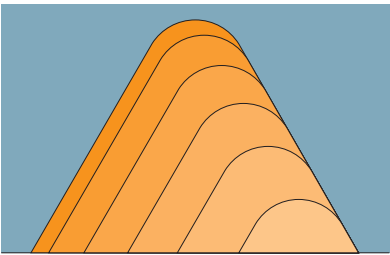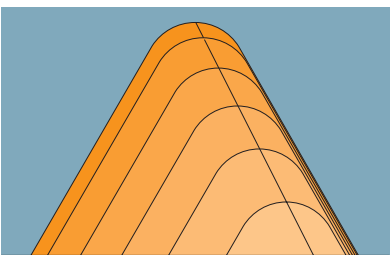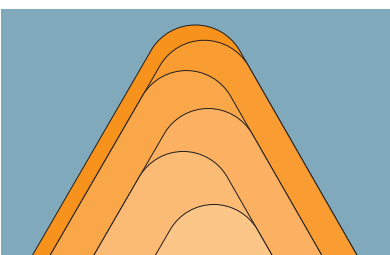Threading Methods

	Features	
	Advantages	Disadvantages
 <p style="text-align: center;">↑ Radial Infeed</p>	<ul style="list-style-type: none"> • Easiest to use. (Standard programme for threading) • Wide application. (Cutting conditions easy to change.) • Uniform wear of the right and left sides of the cutting edge. 	<ul style="list-style-type: none"> • Difficult chip control. • Subject to vibration in the later passes due to long cutting edge in contact with workpiece. • Ineffective for large pitch threading. • Heavy load on the nose radius.
 <p style="text-align: center;">↑ Flank Infeed</p>	<ul style="list-style-type: none"> • Relatively easy to use. (Semi-standard program for threading.) • Reduced cutting force. • Suitable for large pitch threads or materials that peel easily. • Good chip discharge. 	<ul style="list-style-type: none"> • Large flank wear of the right side of a cutting edge. • Relatively difficult to change cutting depth. (Re-programming necessary)
 <p style="text-align: center;">1° – 5° ↑ Modified Flank Infeed</p>	<ul style="list-style-type: none"> • Preventing flank wear on the right side of the cutting edge. • Reduced cutting force. • Good for large pitch or materials that peel easily. • Good chip discharge. 	<ul style="list-style-type: none"> • Complex machining programming. • Difficult to change cutting depth. (NC programming necessary)
 <p style="text-align: center;">↑ ↑ Incremental Infeed</p>	<ul style="list-style-type: none"> • Uniform wear of the right and left sides of the cutting edge. • Reduced cutting force. • Good for large pitch or materials that peel easily. 	<ul style="list-style-type: none"> • Complex machining programming. • Difficult to change cutting depth. (Re-programming necessary) • Chip control is difficult.

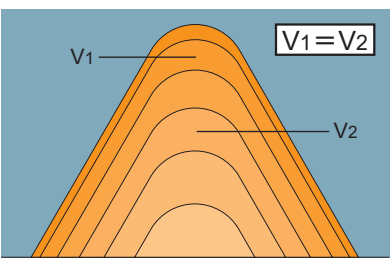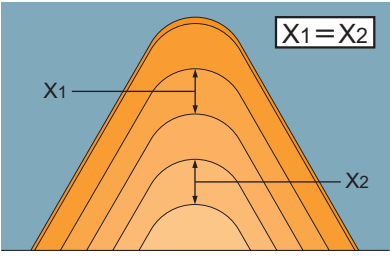Threading depth

		Features	
		Advantages	Disadvantages
 <p>Fixed cut area</p>	<ul style="list-style-type: none"> • Easy to use. (Standard programme for threading.) • Superior resistance to vibration. (Constant cutting force.) 	<ul style="list-style-type: none"> • Long chips generated during the final pass. • Complex calculation of cutting depth when changing the number of passes. 	
 <p>Fixed cutting depth</p>	<ul style="list-style-type: none"> • Reduced load on nose radius during the first half of the passes. • Easy chip control. (Optional setting of chip thickness) • Easy to calculate cutting depth when changing the number of passes. • Good chip control. 	<ul style="list-style-type: none"> • Subject to vibration in the later stages of cutting. (Increased cutting force) • In some cases, changing the NC programme is necessary. 	

* It is recommended to set the depth of cut of the final pass to 0.05mm ~ 0.025mm. Large cutting depths can cause vibration, leading to a poor surface finish.

● Formulae

■ Formulae to calculate infeed for each pass in a reduced series.

$\Delta ap_n = \frac{ap}{\sqrt{n_{ap} - 1}} \times \sqrt{b}$	<p>Example) External threading (ISO metric) Pitch : 1.0mm ap : 0.6mm n_{ap} : 5</p>
<p>Δap_n : Depth of cut n : Actual pass ap : Total depth of cut n_{ap} : Number of passes b : 1st pass 0.3 2nd pass 2-1=1 3rd pass 3-1=2 . . nth pass n-1</p>	<p>1st pass $\Delta ap_1 = \frac{0.60}{\sqrt{5-1}} \times \sqrt{0.3} = 0.16 \rightarrow \mathbf{0.16} (\Delta ap_1)$</p> <p>2nd pass $\Delta ap_2 = \frac{0.60}{\sqrt{5-1}} \times \sqrt{2-1} = 0.3 \rightarrow \mathbf{0.14} (\Delta ap_2 - \Delta ap_1)$</p> <p>3rd pass $\Delta ap_3 = \frac{0.60}{\sqrt{5-1}} \times \sqrt{3-1} = 0.42 \rightarrow \mathbf{0.12} (\Delta ap_3 - \Delta ap_2)$</p> <p>4th pass $\Delta ap_4 = \frac{0.60}{\sqrt{5-1}} \times \sqrt{4-1} = 0.52 \rightarrow \mathbf{0.1} (\Delta ap_4 - \Delta ap_3)$</p> <p>5th pass $\Delta ap_5 = \frac{0.60}{\sqrt{5-1}} \times \sqrt{5-1} = 0.6 \rightarrow \mathbf{0.08} (\Delta ap_5 - \Delta ap_4)$</p>

● NC Programme for Modified Flank Infeed

■ Example:- M12×1.0 5 passes modified 1°-3°

External Threading	Internal Threading
G00 Z = 5.0 X = 14.0	G00 Z = 5.0 X = 10.0
G92 U-4.34 Z-13.0 F1.0	G92 U4.34 Z-13.0 F1.0
G00 W-0.07	G00 W-0.07
G92 U-4.64 Z-13.0 F1.0	G92 U4.64 Z-13.0 F1.0
G00 W-0.06	G00 W-0.05
G92 U-4.88 Z-13.0 F1.0	G92 U4.84 Z-13.0 F1.0
G00 W-0.05	G00 W-0.04
G92 U-5.08 Z-13.0 F1.0	G92 U5.02 Z-13.0 F1.0
G00 W-0.03	G00 W-0.03
G92 U-5.20 Z-13.0 F1.0	G92 U5.14 Z-13.0 F1.0
G00	G00

Recommended Cutting Methods and Conditions

Selecting cutting conditions

		Priority					
		Tool life	Cutting force	Surface finish	Precision of thread	Chips discharge	Efficiency (Reduced passes)
Threading methods	Radial	○		○	○		○
	Flank	(△ : Modified)	○	(△ : Modified)		○	
Cutting depth	Fixed cutting depth					○	
	Fixed cut area	○	○	○	○		○

* Tool life and surface finish accuracy can be increased by changing the threading method from flank infeed to modified flank infeed.

* Chip control can be improved by increasing the cutting depth in the later half of passes.

Cutting depth and the number of passes

Selection of the appropriate cutting depth and the correct number of passes is vital for threading.

- For most threading, use a "threading cycle program," which has originally been installed on machines, and specify "total cutting depth" and "cutting depth in the first or final pass."
- Cutting depth and the number of passes are easy to change for the radial infeed method, thus making it easy to determine the appropriate cutting conditions.

Features and benefits of Mitsubishi products

- Insert grades with high wear and plastic deformation resistance, specially produced for threading tools, ensure highly efficient cutting by enabling high-speed machining and a reduced number of passes.



Machining Cost Reduction

Advice on improved threading

Increasing tool life

- To prevent damage to the nose radius - *Recommended method - Modified flank infeed.*
- To have uniform flank wear on both sides of a cutting edge - *Recommended method - Radial infeed*
- To prevent crater wear - *Recommended method - Flank infeed*

Preventing chip problems

- Change to flank or modified infeed.
- During radial infeed cutting, use an inverted holder and change the coolant supply to a downward direction.
- When using the radial infeed method, set the minimum cutting depth at around 0.2mm to make the chips thicker.
- Tangled chips during internal threading can damage the insert. In these cases, pause slightly away from the start point and clear the chips with coolant before every pass.
- Change to M-class inserts with a 3-D chip breaker.

To achieve highly efficient machining

- Increase cutting speed. (Dependant on the maximum revolution and rigidity of the machine.)
- Reduce the number of passes. (Reduce by 30-40%.)
- A reduced number of passes can improve chip discharge because of the thicker chips generated.

Preventing vibration

- Change to flank or modified infeed.
- When using radial infeed, reduce cutting depth in the later half of passes and lower the cutting speed.

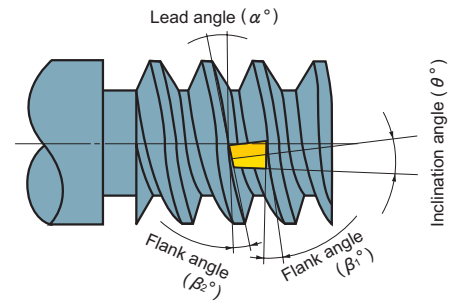
Increased surface finish accuracy

- A final wiping pass should be performed at the same depth of cut as the last regular pass.
- When using the flank infeed method, change to radial infeed only during the final pass.

Selecting a shim for the MMT Series

Flank angle and lead angle

Lead angle (α) depends on a combination of thread diameter and pitch.
 Select a shim so that the lead angle of the thread can coincide with the flank angles of the thread and insert (β_1, β_2). No need to change a shim for general threading with an MMT holder. When threading with a small diameter or large pitch, change the shim depending on the lead angle, referring to the table and graph below. When threading left hand threads, change to a shim with a negative inclination angle.




Shim reference table (Threading diameter)

Lead Angle Pitch (mm)	Right Hand Thread (mm)						Left Hand Thread (mm)		
	Threading impossible	4.5°	3.5°	2.5°	1.5°	0.5°	Threading impossible	-1.5°	-0.5°
0.5	$\leq \phi 1.9$	$\phi 1.9 - \phi 2.2$	$\phi 2.2 - \phi 2.8$	$\phi 2.8 - \phi 4.3$	$\phi 4.3 - \phi 11.4$	$\geq \phi 11.4$	$\leq \phi 4.3$	$\phi 4.3 - \phi 11.4$	$\geq \phi 11.4$
0.75	$\leq \phi 2.9$	$\phi 2.9 - \phi 3.2$	$\phi 3.2 - \phi 4.3$	$\phi 4.3 - \phi 6.5$	$\phi 6.5 - \phi 17.1$	$\geq \phi 17.1$	$\leq \phi 6.5$	$\phi 6.5 - \phi 17.1$	$\geq \phi 17.1$
1	$\leq \phi 3.8$	$\phi 3.8 - \phi 4.3$	$\phi 4.3 - \phi 5.7$	$\phi 5.7 - \phi 8.7$	$\phi 8.7 - \phi 22.8$	$\geq \phi 22.8$	$\leq \phi 8.7$	$\phi 8.7 - \phi 22.8$	$\geq \phi 22.8$
1.25	$\leq \phi 4.8$	$\phi 4.8 - \phi 5.4$	$\phi 5.4 - \phi 7.1$	$\phi 7.1 - \phi 10.9$	$\phi 10.9 - \phi 28.5$	$\geq \phi 28.5$	$\leq \phi 10.9$	$\phi 10.9 - \phi 28.5$	$\geq \phi 28.5$
1.5	$\leq \phi 5.7$	$\phi 5.7 - \phi 6.5$	$\phi 6.5 - \phi 8.5$	$\phi 8.5 - \phi 13.0$	$\phi 13.0 - \phi 34.2$	$\geq \phi 34.2$	$\leq \phi 13.0$	$\phi 13.0 - \phi 34.2$	$\geq \phi 34.2$
1.75	$\leq \phi 6.7$	$\phi 6.7 - \phi 7.6$	$\phi 7.6 - \phi 9.9$	$\phi 9.9 - \phi 15.2$	$\phi 15.2 - \phi 39.9$	$\geq \phi 39.9$	$\leq \phi 15.2$	$\phi 15.2 - \phi 39.9$	$\geq \phi 39.9$
2	$\leq \phi 7.6$	$\phi 7.6 - \phi 8.6$	$\phi 8.6 - \phi 11.4$	$\phi 11.4 - \phi 17.4$	$\phi 17.4 - \phi 45.6$	$\geq \phi 45.6$	$\leq \phi 17.4$	$\phi 17.4 - \phi 45.6$	$\geq \phi 45.6$
2.5	$\leq \phi 9.5$	$\phi 9.5 - \phi 10.8$	$\phi 10.8 - \phi 14.2$	$\phi 14.2 - \phi 21.7$	$\phi 21.7 - \phi 57.0$	$\geq \phi 57.0$	$\leq \phi 21.7$	$\phi 21.7 - \phi 57.0$	$\geq \phi 57.0$
3	$\leq \phi 11.4$	$\phi 11.4 - \phi 13.0$	$\phi 13.0 - \phi 17.0$	$\phi 17.0 - \phi 26.0$	$\phi 26.0 - \phi 68.4$	$\geq \phi 68.4$	$\leq \phi 26.0$	$\phi 26.0 - \phi 68.4$	$\geq \phi 68.4$
3.5	$\leq \phi 13.3$	$\phi 13.3 - \phi 15.1$	$\phi 15.1 - \phi 19.9$	$\phi 19.9 - \phi 30.4$	$\phi 30.4 - \phi 79.8$	$\geq \phi 79.8$	$\leq \phi 30.4$	$\phi 30.4 - \phi 79.8$	$\geq \phi 79.8$
4	$\leq \phi 15.2$	$\phi 15.2 - \phi 17.3$	$\phi 17.3 - \phi 22.7$	$\phi 22.7 - \phi 34.7$	$\phi 34.7 - \phi 91.2$	$\geq \phi 91.2$	$\leq \phi 34.7$	$\phi 34.7 - \phi 91.2$	$\geq \phi 91.2$
4.5	$\leq \phi 17.1$	$\phi 17.1 - \phi 19.4$	$\phi 19.4 - \phi 25.6$	$\phi 25.6 - \phi 39.1$	$\phi 39.1 - \phi 102.6$	$\geq \phi 102.6$	$\leq \phi 39.1$	$\phi 39.1 - \phi 102.6$	$\geq \phi 102.6$
5	$\leq \phi 19.0$	$\phi 19.0 - \phi 21.6$	$\phi 21.6 - \phi 28.4$	$\phi 28.4 - \phi 43.4$	$\phi 43.4 - \phi 114.0$	$\geq \phi 114.0$	$\leq \phi 43.4$	$\phi 43.4 - \phi 114.0$	$\geq \phi 114.0$


(Note) Back turning in the case of left hand threads.

Shim reference graph

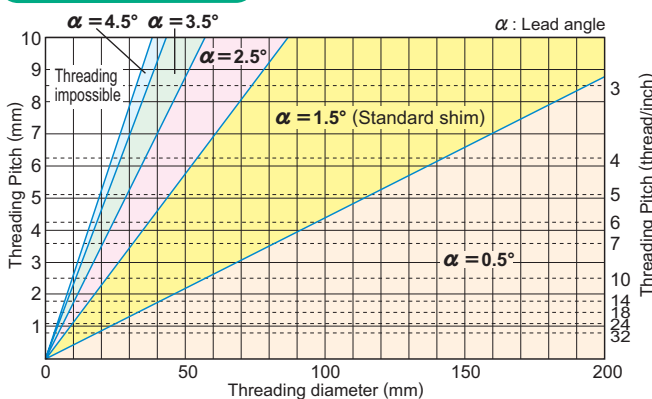Right hand thread



Left hand thread

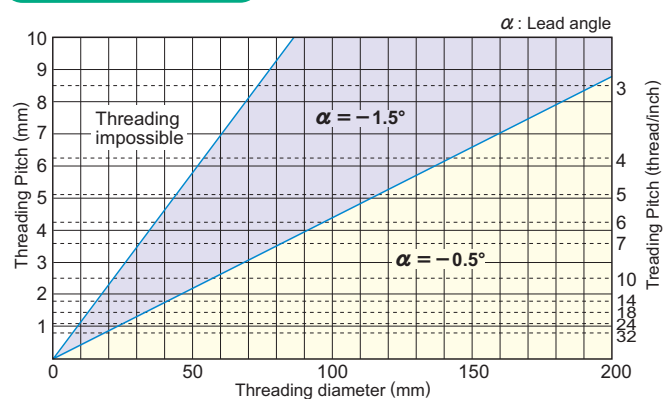

Note) When a thread lead angle \leq the tool flank angle, change the shim to prevent side interference with the insert.
 (Refer to the table below for the calculation of thread lead angle and tool flank angle.)

When replacing a shim, check if the difference between the thread lead angle and shim inclination angle is within: 2.5° - 0.5° where thread helix angle is 60° (55°) 2° - 1° where thread helix angle is 30° (29°)

- * Inclination angle of a standard shim is 0°.
- * The holder has a 1.5° lead angle.

Calculation of thread lead angle

$$\tan \alpha = \frac{l}{\pi d} = \frac{nP}{\pi d}$$

- α : Lead angle
- l : Lead
- n : Number of threads
- P : Pitch
- d : Effective diameter of thread

Example of selecting a shim

- When the thread lead angle is 2.2°
 - In the case when the thread helix angle is 60°
 (2.2° lead angle) - (2.5° - 0.5°) = -0.3° - 1.7° shim inclination angle is appropriate. Threading with a standard shim (0° inclination angle) is possible. But, replacing with a shim with a 1° inclination angle is recommended, refer to Standard Shim List on pages 9 and 10.
 - In the case when the thread helix angle is 30°
 (2.2° lead angle) - (2° - 1°) = 0.2° - 1.2° shim inclination angle is appropriate. Replacing with a shim with a 1° inclination angle is recommended, referring to Standard Shim List on pages 9 and 10.

Relief angle of an insert set on a holder

Thread helix angle	Internal relief angle	External relief angle
60°	8.5°	6°
55°	7°	7°
30°	4°	2.5°
29°	4°	2.5°

Relief angles (β_2, β_1) of an insert become small when the thread helix angle of a trapezoidal, round, or other thread is small. Take care when selecting a shim.

Standard of depth of cut (External threading)

EXTERNAL (RADIAL INFEED)

ISO Metric

Pitch (mm)	Total Cutting Depth	Number of Passes														Insert Type		
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	G-class grinding inserts	M-class inserts with 3-D chip breakers	
0.5	0.31	0.10	0.08	0.07	0.06												MMT16ER050ISO	—
0.75	0.46	0.16	0.14	0.10	0.06												16ER075ISO	—
1.0	0.61	0.18	0.15	0.12	0.10	0.06											16ER100ISO	MMT16ER100ISO-S
1.25	0.77	0.19	0.17	0.14	0.11	0.10	0.06										16ER125ISO	16ER125ISO-S
1.5	0.92	0.22	0.21	0.17	0.14	0.12	0.06										16ER150ISO	16ER150ISO-S
1.75	1.07	0.22	0.21	0.16	0.13	0.11	0.09	0.09	0.06								16ER175ISO	16ER175ISO-S
2.0	1.23	0.24	0.23	0.17	0.16	0.14	0.12	0.11	0.06								16ER200ISO	16ER200ISO-S
2.5	1.53	0.26	0.23	0.19	0.17	0.15	0.13	0.12	0.11	0.11	0.06						16ER250ISO	16ER250ISO-S
3.0	1.84	0.27	0.25	0.20	0.18	0.16	0.14	0.13	0.12	0.12	0.11	0.10	0.06				16ER300ISO	16ER300ISO-S
3.5	2.15	0.33	0.30	0.24	0.21	0.18	0.17	0.15	0.14	0.14	0.12	0.11	0.06				22ER350ISO	—
4.0	2.45	0.34	0.31	0.24	0.22	0.19	0.17	0.16	0.14	0.14	0.13	0.12	0.12	0.11	0.06		22ER400ISO	—
4.5	2.76	0.38	0.34	0.28	0.24	0.22	0.20	0.18	0.16	0.16	0.15	0.14	0.13	0.12	0.06		22ER450ISO	—
5.0	3.07	0.42	0.38	0.32	0.27	0.24	0.22	0.20	0.18	0.18	0.17	0.16	0.15	0.12	0.06		22ER500ISO	—

American UN

Pitch (thread/inch)	Total Cutting Depth	Number of Passes														Insert Type		
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	G-class grinding inserts	M-class inserts with 3-D chip breakers	
32	0.49	0.17	0.15	0.11	0.06												MMT16ER320UN	—
28	0.56	0.17	0.14	0.10	0.09	0.06											16ER280UN	—
24	0.65	0.18	0.16	0.14	0.11	0.06											16ER240UN	—
20	0.78	0.20	0.18	0.13	0.11	0.10	0.06										16ER200UN	—
18	0.87	0.22	0.20	0.15	0.13	0.11	0.06										16ER180UN	—
16	0.97	0.22	0.20	0.15	0.12	0.11	0.11	0.06									16ER160UN	MMT16ER160UN-S
14	1.11	0.23	0.21	0.16	0.13	0.11	0.11	0.10	0.06								16ER140UN	16ER140UN-S
13	1.20	0.25	0.22	0.17	0.14	0.13	0.12	0.11	0.06								16ER130UN	—
12	1.30	0.28	0.23	0.18	0.16	0.14	0.13	0.12	0.06								16ER120UN	MMT16ER120UN-S
11	1.42	0.28	0.23	0.19	0.16	0.14	0.13	0.12	0.11	0.06							16ER110UN	—
10	1.56	0.28	0.24	0.19	0.16	0.14	0.13	0.13	0.12	0.11	0.06						16ER100UN	—
9	1.73	0.34	0.29	0.22	0.17	0.15	0.14	0.13	0.12	0.11	0.06						16ER090UN	—
8	1.95	0.35	0.30	0.24	0.19	0.16	0.15	0.14	0.13	0.12	0.11	0.06					16ER080UN	—
7	2.22	0.37	0.33	0.28	0.24	0.20	0.17	0.16	0.15	0.14	0.12	0.06					22ER070UN	—
6	2.60	0.42	0.35	0.29	0.25	0.21	0.18	0.17	0.16	0.15	0.13	0.12	0.11	0.06			22ER060UN	—
5	3.12	0.43	0.39	0.31	0.27	0.24	0.22	0.20	0.19	0.19	0.18	0.17	0.15	0.12	0.06		22ER050UN	—

Whitworth for BSW, BSP

Pitch (thread/inch)	Total Cutting Depth	Number of Passes														Insert Type		
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	G-class grinding inserts	M-class inserts with 3-D chip breakers	
28	0.58	0.17	0.14	0.11	0.10	0.06											MMT16ER280W	—
26	0.63	0.18	0.15	0.13	0.11	0.06											16ER260W	—
20	0.81	0.20	0.18	0.14	0.12	0.11	0.06										16ER200W	—
19	0.86	0.21	0.19	0.15	0.13	0.12	0.06										16ER190W	MMT16ER190W-S
18	0.90	0.25	0.19	0.15	0.13	0.12	0.06										16ER180W	—
16	1.02	0.21	0.18	0.15	0.13	0.11	0.09	0.09	0.06								16ER160W	—
14	1.16	0.23	0.21	0.17	0.14	0.12	0.12	0.11	0.06								16ER140W	MMT16ER140W-S
12	1.36	0.27	0.25	0.20	0.16	0.15	0.14	0.13	0.06								16ER120W	—
11	1.48	0.27	0.24	0.20	0.17	0.15	0.14	0.13	0.12	0.06							16ER110W	MMT16ER110W-S
10	1.63	0.27	0.25	0.20	0.17	0.15	0.15	0.13	0.13	0.12	0.06						16ER100W	—
9	1.81	0.28	0.26	0.21	0.18	0.16	0.15	0.14	0.13	0.12	0.12	0.06					16ER090W	—
8	2.03	0.30	0.27	0.22	0.19	0.17	0.16	0.15	0.14	0.13	0.12	0.12	0.06				16ER080W	—
7	2.32	0.34	0.32	0.26	0.22	0.20	0.18	0.17	0.16	0.15	0.14	0.12	0.06				22ER070W	—
6	2.71	0.35	0.33	0.27	0.23	0.21	0.20	0.19	0.17	0.16	0.15	0.14	0.13	0.12	0.06		22ER060W	—
5	3.25	0.42	0.40	0.35	0.29	0.26	0.24	0.22	0.20	0.19	0.18	0.17	0.15	0.12	0.06		22ER050W	—

- (Note) · Set the finishing allowance on a diameter at approx. 0.1mm when using a full form insert.
 · Please note the cutting depth and the number of passes when a nose radius of a partial form insert or of an internal threading insert is small to prevent damage to the insert nose.
 · Please set the cutting depth sufficiently deep enough on materials such as hardened steel or austenitic stainless steel to help prevent premature wear and chipping caused by the outer layer of the material.

BSPT

Pitch (thread/ inch)	Total Cutting Depth	Number of Passes											Insert Type				
		1	2	3	4	5	6	7	8	9				G-class grinding inserts	M-class inserts with 3-D chip breakers		
28	0.58	0.17	0.14	0.11	0.10	0.06										MMT16ER280BSPT	—
19	0.86	0.22	0.19	0.15	0.12	0.12	0.06									16ER190BSPT	MMT16ER190BSPT-S
14	1.16	0.24	0.20	0.17	0.14	0.12	0.12	0.11	0.06							16ER140BSPT	16ER140BSPT-S
11	1.48	0.25	0.23	0.21	0.18	0.16	0.14	0.13	0.12	0.06						16ER110BSPT	16ER110BSPT-S

Round DIN 405

Pitch (thread/ inch)	Total Cutting Depth	Number of Passes														Insert Type	
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	G-class grinding inserts	
10	1.27	0.23	0.21	0.20	0.19	0.16	0.12	0.10	0.06								MMT16ER100RD
8	1.59	0.23	0.21	0.20	0.19	0.18	0.16	0.14	0.12	0.10	0.06						16ER080RD
6	2.12	0.26	0.25	0.24	0.22	0.21	0.19	0.17	0.16	0.14	0.12	0.10	0.06				16ER060RD
4	3.18	0.34	0.33	0.32	0.30	0.28	0.26	0.24	0.22	0.20	0.19	0.17	0.15	0.12	0.06		22ER040RD

ISO Trapezoidal 30°

Pitch (mm)	Total Cutting Depth	Number of Passes														Insert Type	
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	G-class grinding inserts	
1.5	0.90	0.23	0.21	0.16	0.13	0.11	0.06										MMT16ER150TR
2.0	1.25	0.29	0.26	0.21	0.17	0.14	0.12	0.06									16ER200TR
3.0	1.75	0.32	0.31	0.24	0.19	0.18	0.17	0.15	0.13	0.06							16ER300TR
4.0	2.25	0.33	0.32	0.24	0.22	0.21	0.17	0.16	0.15	0.14	0.13	0.12	0.16				22ER400TR
5.0	2.75	0.35	0.32	0.26	0.24	0.22	0.21	0.19	0.19	0.17	0.15	0.14	0.13	0.12	0.06		22ER500TR

American ACME

Pitch (thread/ inch)	Total Cutting Depth	Number of Passes														Insert Type	
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	G-class grinding inserts	
12	1.19	0.27	0.23	0.20	0.17	0.14	0.12	0.06									MMT16ER120ACME
10	1.52	0.29	0.25	0.21	0.18	0.16	0.14	0.12	0.11	0.06							16ER100ACME
8	1.84	0.30	0.26	0.22	0.19	0.16	0.15	0.14	0.13	0.12	0.11	0.06					16ER080ACME
6	2.37	0.34	0.30	0.27	0.24	0.21	0.19	0.16	0.14	0.12	0.12	0.11	0.11	0.06			22ER060ACME
5	2.79	0.36	0.33	0.30	0.26	0.23	0.20	0.18	0.17	0.16	0.15	0.14	0.13	0.12	0.06		22ER050ACME

UNJ

Pitch (thread/ inch)	Total Cutting Depth	Number of Passes														Insert Type	
		1	2	3	4	5	6	7	8	9	10	11				G-class grinding inserts	
32	0.46	0.16	0.14	0.10	0.06												MMT16ER320UNJ
28	0.52	0.16	0.12	0.09	0.09	0.06											16ER280UNJ
24	0.61	0.17	0.14	0.14	0.10	0.06											16ER240UNJ
20	0.73	0.19	0.16	0.13	0.10	0.09	0.06										16ER200UNJ
18	0.81	0.23	0.18	0.14	0.10	0.10	0.06										16ER180UNJ
16	0.92	0.26	0.21	0.14	0.12	0.10	0.09										16ER160UNJ
14	1.05	0.26	0.23	0.17	0.12	0.11	0.10	0.06									16ER140UNJ
12	1.22	0.28	0.27	0.20	0.17	0.13	0.11	0.06									16ER120UNJ
10	1.47	0.30	0.29	0.21	0.15	0.13	0.12	0.11	0.10	0.06							16ER100UNJ
8	1.83	0.31	0.30	0.23	0.18	0.15	0.14	0.13	0.12	0.11	0.10	0.06					16ER080UNJ

API Buttress Casing

Pitch (thread/ inch)	Total Cutting Depth	Number of Passes											Insert Type				
		1	2	3	4	5	6	7	8	9	10	11			G-class grinding inserts		
5	1.55	0.25	0.23	0.17	0.15	0.13	0.12	0.12	0.11	0.11	0.10	0.06					MMT22ER050APBU

- (Note) · Set the finishing allowance on a diameter at approx. 0.1mm when using a full form insert.
 · Please note the cutting depth and the number of passes when a nose radius of a partial form insert or of an internal threading insert is small to prevent damage to the insert nose.
 · Please set the cutting depth sufficiently deep enough on materials such as hardened steel or austenitic stainless steel to help prevent premature wear and chipping caused by the outer layer of the material.

Standard of depth of cut (External threading)

EXTERNAL (RADIAL INFEED)

API Round Casing & Tubing

Pitch (thread/ inch)	Total Cutting Depth	Number of Passes														Insert Type			
		1	2	3	4	5	6	7	8	9	10	11	12						
10	1.41	0.25	0.23	0.16	0.14	0.12	0.12	0.12	0.11	0.10	0.06								G-class grinding inserts
8	1.81	0.25	0.24	0.19	0.16	0.14	0.14	0.13	0.13	0.13	0.13	0.11	0.06						MMT16ER100APRD 16ER080APRD

American NPT

Pitch (thread/ inch)	Total Cutting Depth	Number of Passes															Insert Type		
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15			
27	0.66	0.15	0.13	0.12	0.11	0.09	0.06												G-class grinding inserts
18	1.01	0.20	0.16	0.14	0.13	0.12	0.11	0.09	0.06										MMT16ER270NPT 16ER180NPT
14	1.33	0.23	0.19	0.16	0.14	0.13	0.12	0.11	0.10	0.09	0.06								16ER140NPT
11.5	1.64	0.24	0.19	0.17	0.15	0.15	0.13	0.13	0.12	0.11	0.10	0.09	0.06						16ER115NPT
8	2.42	0.33	0.28	0.23	0.20	0.18	0.16	0.15	0.14	0.13	0.12	0.12	0.11	0.11	0.10	0.06			16ER080NPT

American NPTF

Pitch (thread/ inch)	Total Cutting Depth	Number of Passes															Insert Type		
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15			
27	0.64	0.16	0.14	0.11	0.09	0.08	0.06												G-class grinding inserts
18	1.00	0.19	0.16	0.14	0.13	0.12	0.11	0.09	0.06										MMT16ER270NPTF 16ER180NPTF
14	1.35	0.23	0.21	0.16	0.14	0.13	0.12	0.11	0.10	0.09	0.06								16ER140NPTF
11.5	1.63	0.24	0.23	0.19	0.15	0.13	0.11	0.11	0.11	0.10	0.10	0.10	0.06						16ER115NPTF
8	2.38	0.32	0.27	0.23	0.19	0.17	0.16	0.15	0.14	0.13	0.12	0.12	0.11	0.11	0.10	0.06			16ER080NPTF

- (Note)
- Set the finishing allowance on a diameter at approx. 0.1mm when using a full form insert.
 - Please note the cutting depth and the number of passes when a nose radius of a partial form insert or of an internal threading insert is small to prevent damage to the insert nose.
 - Please set the cutting depth sufficiently deep enough on materials such as hardened steel or austenitic stainless steel to help prevent premature wear and chipping caused by the outer layer of the material.

Standard of depth of cut (Internal threading)

INTERNAL (RADIAL INFED)

ISO Metric

Pitch (mm)	Total Cutting Depth	Number of Passes														Insert Type			
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	G-class grinding inserts		M-class inserts with 3-D chip breakers	
0.5	0.29	0.09	0.07	0.07	0.06											MMT11R050ISO	MMT16R050ISO	—	—
0.75	0.43	0.15	0.13	0.09	0.06											11R075ISO	16R075ISO	—	—
1.0	0.58	0.17	0.15	0.11	0.09	0.06										11R100ISO	16R100ISO	MMT11R100ISO-S	MMT16R100ISO-S
1.25	0.72	0.18	0.16	0.12	0.11	0.09	0.06									11R125ISO	16R125ISO	11R125ISO-S	16R125ISO-S
1.5	0.87	0.21	0.20	0.16	0.13	0.11	0.06									11R150ISO	16R150ISO	11R150ISO-S	16R150ISO-S
1.75	1.01	0.21	0.20	0.15	0.12	0.10	0.09	0.08	0.06							11R175ISO	16R175ISO	—	16R175ISO-S
2.0	1.15	0.24	0.22	0.18	0.14	0.12	0.10	0.09	0.06							11R200ISO	16R200ISO	—	16R200ISO-S
2.5	1.44	0.25	0.24	0.21	0.15	0.13	0.12	0.10	0.09	0.09	0.06					—	16R250ISO	—	16R250ISO-S
3.0	1.73	0.26	0.25	0.22	0.17	0.14	0.13	0.12	0.11	0.10	0.09	0.08	0.06			—	16R300ISO	—	16R300ISO-S
3.5	2.02	0.32	0.30	0.23	0.19	0.17	0.15	0.14	0.13	0.12	0.11	0.10	0.06			—	22R350ISO	—	—
4.0	2.31	0.33	0.31	0.24	0.22	0.18	0.15	0.14	0.13	0.12	0.12	0.11	0.10	0.10	0.06	—	22R400ISO	—	—
4.5	2.60	0.36	0.33	0.28	0.24	0.21	0.19	0.16	0.15	0.14	0.13	0.12	0.12	0.11	0.06	—	22R450ISO	—	—
5.0	2.89	0.41	0.38	0.32	0.27	0.24	0.21	0.18	0.16	0.15	0.14	0.13	0.12	0.12	0.06	—	22R500ISO	—	—

American UN

Pitch (thread/inch)	Total Cutting Depth	Number of Passes														Insert Type			
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	G-class grinding inserts		M-class inserts with 3-D chip breakers	
32	0.46	0.16	0.14	0.10	0.06											MMT11R320UN	MMT16R320UN	—	—
28	0.52	0.16	0.13	0.09	0.08	0.06										11R280UN	16R280UN	—	—
24	0.61	0.17	0.15	0.13	0.10	0.06										11R240UN	16R240UN	—	—
20	0.73	0.18	0.15	0.13	0.11	0.10	0.06									11R200UN	16R200UN	—	—
18	0.81	0.20	0.18	0.14	0.12	0.11	0.06									11R180UN	16R180UN	—	—
16	0.92	0.20	0.18	0.15	0.12	0.11	0.10	0.06								11R160UN	16R160UN	MMT16R160UN-S	—
14	1.05	0.21	0.18	0.15	0.13	0.11	0.11	0.10	0.06							11R140UN	16R140UN	16R140UN-S	—
13	1.13	0.22	0.19	0.16	0.14	0.13	0.12	0.11	0.06							—	16R130UN	—	—
12	1.22	0.24	0.22	0.18	0.16	0.13	0.12	0.11	0.06							—	16R120UN	MMT16R120UN-S	—
11	1.33	0.24	0.22	0.20	0.15	0.12	0.12	0.11	0.11	0.06						—	16R110UN	—	—
10	1.47	0.25	0.22	0.21	0.14	0.13	0.12	0.12	0.11	0.11	0.06					—	16R100UN	—	—
9	1.63	0.31	0.23	0.21	0.17	0.15	0.14	0.13	0.12	0.11	0.06					—	16R090UN	—	—
8	1.83	0.31	0.26	0.21	0.18	0.16	0.15	0.14	0.13	0.12	0.11	0.06				—	16R080UN	—	—
7	2.09	0.36	0.30	0.24	0.21	0.18	0.17	0.16	0.15	0.14	0.12	0.06				—	22R070UN	—	—
6	2.44	0.40	0.33	0.25	0.23	0.19	0.17	0.16	0.15	0.14	0.13	0.12	0.11	0.06		—	22R060UN	—	—
5	2.93	0.41	0.35	0.31	0.26	0.23	0.21	0.20	0.19	0.17	0.15	0.14	0.13	0.12	0.06	—	22R050UN	—	—

Whitworth for BSW, BSP

Pitch (thread/inch)	Total Cutting Depth	Number of Passes														Insert Type			
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	G-class grinding inserts		M-class inserts with 3-D chip breakers	
28	0.58	0.17	0.14	0.11	0.10	0.06										—	MMT16R280W	—	—
26	0.63	0.18	0.15	0.13	0.11	0.06										—	16R260W	—	—
20	0.81	0.20	0.18	0.14	0.12	0.11	0.06									—	16R200W	—	—
19	0.86	0.21	0.19	0.15	0.13	0.12	0.06									MMT11R190W	16R190W	MMT16R190W-S	—
18	0.90	0.25	0.19	0.15	0.13	0.12	0.06									—	16R180W	—	—
16	1.02	0.21	0.18	0.15	0.13	0.11	0.09	0.09	0.06							—	16R160W	—	—
14	1.16	0.23	0.21	0.17	0.14	0.12	0.12	0.11	0.06							MMT11R140W	16R140W	MMT16R140W-S	—
12	1.36	0.27	0.25	0.20	0.16	0.15	0.14	0.13	0.06							—	16R120W	16R120W-S	—
11	1.48	0.27	0.24	0.20	0.17	0.15	0.14	0.13	0.12	0.06						—	16R110W	—	—
10	1.63	0.27	0.25	0.20	0.17	0.15	0.15	0.13	0.13	0.12	0.06					—	16R100W	—	—
9	1.81	0.28	0.26	0.21	0.18	0.16	0.15	0.14	0.13	0.12	0.12	0.06				—	16R090W	—	—
8	2.03	0.30	0.27	0.22	0.19	0.17	0.16	0.15	0.14	0.13	0.12	0.12	0.06			—	16R080W	—	—
7	2.32	0.34	0.32	0.26	0.22	0.20	0.18	0.17	0.16	0.15	0.14	0.12	0.06			—	22R070W	—	—
6	2.71	0.35	0.33	0.27	0.23	0.21	0.20	0.19	0.17	0.16	0.15	0.14	0.13	0.12	0.06	—	22R060W	—	—
5	3.25	0.42	0.40	0.35	0.29	0.26	0.24	0.22	0.20	0.19	0.18	0.17	0.15	0.12	0.06	—	22R050W	—	—

- (Note) · Set the finishing allowance on a diameter at approx. 0.1mm when using a full form insert.
 · Please note the cutting depth and the number of passes when a nose radius of a partial form insert or of an internal threading insert is small to prevent damage to the insert nose.
 · Please set the cutting depth sufficiently deep enough on materials such as hardened steel or austenitic stainless steel to help prevent premature wear and chipping caused by the outer layer of the material.

Standard of depth of cut (Internal threading)

INTERNAL (RADIAL INFED)

BSPT

Pitch (thread/inch)	Total Cutting Depth	Number of Passes													Insert Type					
		1	2	3	4	5	6	7	8	9								G-class grinding inserts	M-class inserts with 3-D chip breakers	
19	0.86	0.22	0.19	0.15	0.12	0.12	0.06											MMT11IR190BSPT	MMT16IR190BSPT	MMT16IR190BSPT-S
14	1.16	0.24	0.20	0.17	0.14	0.12	0.12	0.11	0.06									11IR140BSPT	16IR140BSPT	16IR140BSPT-S
11	1.48	0.25	0.23	0.21	0.18	0.16	0.14	0.13	0.12	0.06								—	16IR110BSPT	16IR110BSPT-S

Round DIN 405

Pitch (thread/inch)	Total Cutting Depth	Number of Passes														Insert Type			
		1	2	3	4	5	6	7	8	9	10	11	12	13	14			G-class grinding inserts	
10	1.27	0.23	0.21	0.20	0.19	0.16	0.12	0.10	0.06										MMT16IR100RD
8	1.59	0.23	0.21	0.20	0.19	0.18	0.16	0.14	0.12	0.10	0.06								16IR080RD
6	2.12	0.26	0.25	0.24	0.22	0.21	0.19	0.17	0.16	0.14	0.12	0.10	0.06						16IR060RD
4	3.18	0.34	0.33	0.32	0.30	0.28	0.26	0.24	0.22	0.20	0.19	0.17	0.15	0.12	0.06				22IR040RD

ISO Trapezoidal 30°

Pitch (mm)	Total Cutting Depth	Number of Passes														Insert Type			
		1	2	3	4	5	6	7	8	9	10	11	12	13	14			G-class grinding inserts	
1.5	0.90	0.23	0.21	0.16	0.13	0.11	0.06												MMT16IR150TR
2	1.25	0.29	0.26	0.21	0.17	0.14	0.12	0.06											16IR200TR
3	1.75	0.32	0.31	0.24	0.19	0.18	0.17	0.15	0.13	0.06									16IR300TR
4	2.25	0.33	0.32	0.24	0.22	0.21	0.17	0.16	0.15	0.14	0.13	0.12	0.06						22IR400TR
5	2.75	0.35	0.32	0.26	0.24	0.22	0.21	0.19	0.19	0.17	0.15	0.14	0.13	0.12	0.06				22IR500TR

American ACME

Pitch (thread/inch)	Total Cutting Depth	Number of Passes														Insert Type			
		1	2	3	4	5	6	7	8	9	10	11	12	13	14			G-class grinding inserts	
12	1.19	0.27	0.23	0.20	0.17	0.14	0.12	0.06											MMT16IR120ACME
10	1.52	0.29	0.25	0.21	0.18	0.16	0.14	0.12	0.11	0.06									16IR100ACME
8	1.84	0.30	0.26	0.22	0.19	0.16	0.15	0.14	0.13	0.12	0.11	0.06							16IR080ACME
6	2.37	0.34	0.30	0.27	0.24	0.21	0.19	0.16	0.14	0.12	0.12	0.11	0.11	0.06					22IR060ACME
5	2.79	0.36	0.33	0.30	0.26	0.23	0.20	0.18	0.17	0.16	0.15	0.14	0.13	0.12	0.06				22IR050ACME

API Buttress Casing

Pitch (thread/inch)	Total Cutting Depth	Number of Passes														Insert Type			
		1	2	3	4	5	6	7	8	9	10	11							G-class grinding inserts
5	1.55	0.25	0.23	0.17	0.15	0.13	0.12	0.12	0.11	0.11	0.10	0.06							MMT22IR050APBU

API Round Casing & Tubing

Pitch (thread/inch)	Total Cutting Depth	Number of Passes												Insert Type					
		1	2	3	4	5	6	7	8	9	10	11	12			G-class grinding inserts			
10	1.41	0.25	0.23	0.16	0.14	0.12	0.12	0.12	0.11	0.10	0.06								MMT16IR100APRD
8	1.81	0.25	0.24	0.19	0.16	0.14	0.14	0.13	0.13	0.13	0.13	0.11	0.06						16IR080APRD

- (Note)
- Set the finishing allowance on a diameter at approx. 0.1mm when using a full form insert.
 - Please note the cutting depth and the number of passes when a nose radius of a partial form insert or of an internal threading insert is small to prevent damage to the insert nose.
 - Please set the cutting depth sufficiently deep enough on materials such as hardened steel or austenitic stainless steel to help prevent premature wear and chipping caused by the outer layer of the material.

American NPT











Pitch (thread/ inch)	Total Cutting Depth	Number of Passes															Insert Type		
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	G-class grinding inserts		
27	0.66	0.15	0.13	0.12	0.11	0.09	0.06											MMT16IR270NPT	
18	1.01	0.20	0.16	0.14	0.13	0.12	0.11	0.09	0.06									16IR180NPT	
14	1.33	0.23	0.19	0.16	0.14	0.13	0.12	0.11	0.10	0.09	0.06							16IR140NPT	
11.5	1.64	0.24	0.19	0.17	0.15	0.15	0.13	0.13	0.12	0.11	0.10	0.09	0.06					16IR115NPT	
8	2.42	0.33	0.28	0.23	0.20	0.18	0.16	0.15	0.14	0.13	0.12	0.12	0.11	0.11	0.10	0.06		16IR080NPT	

American NPTF

Pitch (thread/ inch)	Total Cutting Depth	Number of Passes															Insert Type		
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	G-class grinding inserts		
14	1.35	0.23	0.21	0.16	0.14	0.13	0.12	0.11	0.10	0.09	0.06							MMT16IR140NPTF	
11.5	1.63	0.24	0.23	0.19	0.15	0.13	0.11	0.11	0.11	0.10	0.10	0.10	0.06					16IR115NPTF	
8	2.38	0.32	0.27	0.23	0.19	0.17	0.16	0.15	0.14	0.13	0.12	0.12	0.11	0.11	0.10	0.06		16IR080NPTF	

- (Note) · Set the finishing allowance on a diameter at approx. 0.1mm when using a full form insert.
 · Please note the cutting depth and the number of passes when a nose radius of a partial form insert or of an internal threading insert is small to prevent damage to the insert nose.
 · Please set the cutting depth sufficiently deep enough on materials such as hardened steel or austenitic stainless steel to help prevent premature wear and chipping caused by the outer layer of the material.

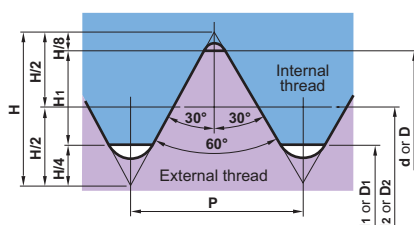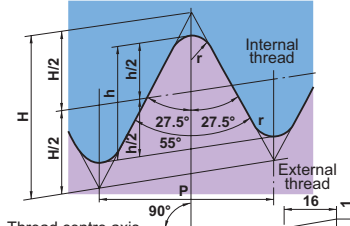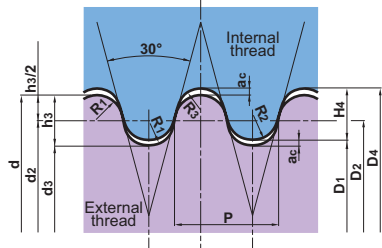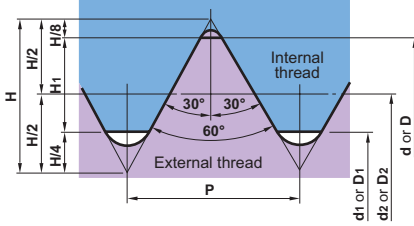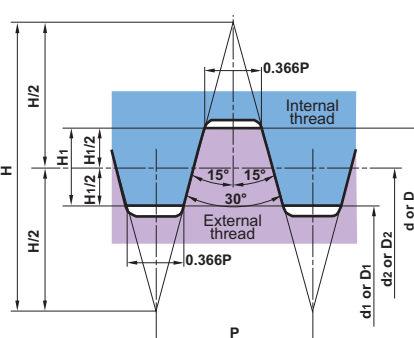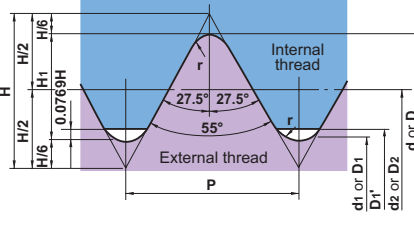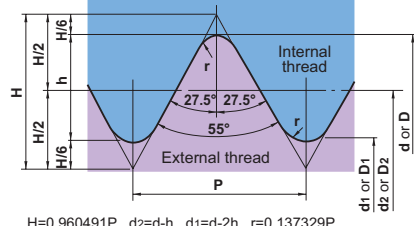STANDARD THREAD AND CORRESPONDING INSERT·HOLDER

Thread Name	Standard Thread Type	Type	Thread Name	Standard Thread Type	Type
ISO Metric	 <p> $H=0.866025P$ $d_2=d-0.649519P$ $H_1=0.541266P$ $d_1=d-1.082532P$ $D=d$ $D_2=d_2$ $D_1=d_1$ </p>	M	BSPT	 <p> $H=0.960237P$ $h=0.640327$ $r=0.137278P$ $P=25.4/\text{thread}$ </p>	BSPT
			Round DIN 405	 <p> $ac=0.05 \times P$ $h_3=H_4=0.5 \times P$ $R_1=0.238507 \times P$ $R_2=0.255967 \times P$ $R_3=0.221047 \times P$ </p>	Rd
American UN	 <p> $H=0.866025 \times 25.4/n$ $d_2=(d-0.649519/n) \times 25.4$ $H_1=0.541266 \times 25.4/n$ $d_1=(d-1.082532/n) \times 25.4$ $d=(d) \times 25.4$ $D=d$ $D_2=d_2$ $D_1=d_1$ $P=25.4/\text{thread}$ </p>	UNC UNF	ISO Trapezoidal 30°		Tr
			American ACME		ACME
Whitworth for BSW, BSP	 <p> $H=0.9605P$ $d_2=d-H_1$ $d_1=d-2H_1$ $r=0.1373P$ $H_1=0.6403P$ $D_1'=d_1+2 \times 0.0769H$ $D=d$ $D_2=d_2$ $D_1=d_1$ $P=25.4/\text{thread}$ </p>	W	American NPT	 <p> $H=0.960491P$ $d_2=d-h$ $d_1=d-2h$ $r=0.137329P$ $h=0.640327$ $D=d$ $D_2=d_2$ $D_1=d_1$ $25.4/\text{thread}$ </p>	PF RG RP
Parallel Pipe Thread	 <p> $H=0.960491P$ $d_2=d-h$ $d_1=d-2h$ $r=0.137329P$ $h=0.640327$ $D=d$ $D_2=d_2$ $D_1=d_1$ $25.4/\text{thread}$ </p>	PF RG RP		 <p> $H=0.866025P$ $h=0.800000p$ </p>	NPT

Wiper : Insert order number is determined by the selected pitch.
 General : An insert is applicable to several pitch types.

Troubleshooting

Problems	Observation	Causes	Solutions	
Low thread precision.	Threads do not mesh with each other.	Incorrect tool installation.	Set the insert centre height at 0mm. Check holder inclination (Lateral).	
		Shallow thread.	Modify the depth of cut.	
		Lack of insert wear or plastic deformation resistance.	Refer to "Quickly generated flank wear." and "Large plastic deformation." below.	
Poor surface finish.	Surface damage.	Chips wrap around or clog the work pieces.	Change to flank infeed and control the chip discharge direction. Change to an M-class insert with a 3-D chip breaker.	
		The side of the insert cutting edge interferes with the workpiece.	Check the lead angle and select an appropriate shim.	
		Surface tears.	Built-up edge (Welding). Cutting resistance too high.	Increase cutting speed. Increase coolant pressure and volume. Decrease depth of cut per pass.
	Surface vibrations.	Cutting speed too high.	Decrease the cutting speed.	
		Insufficient work piece or tool clamping.	Re-check work piece and tool clamping. (Chuck pressure, clamping allowance)	
		Incorrect tool installation.	Set the insert centre height at 0mm.	
	Short tool life.	Flank wear quickly generated.	Cutting speed too high.	Decrease the cutting speed.
			Too many passes causes abrasive wear.	Reduce the number of passes.
Small depth of cut for the finishing pass.			Do not re-cut at 0mm depth of cut, larger than 0.05mm depth of cut is recommended.	
Non-uniform wear of the right and left sides of the cutting edge.		The work piece lead angle and the tool lead angle do not match.	Check the work piece lead angle and select an appropriate shim.	
Chipping and fracture.		Cutting speed too low.	Increase cutting speed.	
		Cutting resistance too high.	Increase the number of passes and decrease the cutting resistance per pass.	
		Unstable clamping.	Check work piece deflection. Shorten tool overhang. Recheck work piece and tool clamping. (Chuck pressure, clamping allowance)	
			Chip packing.	Increase coolant pressure to blow away chips. Change the tool pass to control chips. (Lengthen each pass to allow the coolant to clear the chips. Change from standard internal cutting to back turning to prevent chip jamming.
				Non-chamfered work pieces causes high resistance at the start of each pass.
		Large plastic deformation.		High cutting speed and large heat generation.
			Lack of coolant supply.	Check coolant is supply is sufficient. Increase coolant pressure and volume.
Cutting resistance too high.				Increase the number of passes and decrease the cutting resistance per pass.

Application example

Insert (Grade)		MMT16ER100ISO(VP10MF)	MMT16ER110BSPT(VP15TF)
Workpiece		JIS SCM35 Plug ISO Metric M18×1.0 	JIS SUS316 Bolt Taper Pipe Thread R7/8
	Cutting Conditions		
	Cutting Speed (m/min)	120	100
	Pass	5 times	20 times
	Cutting Method	Radial Infeed	Radial Infeed
	Depth of Cut	Fixed cut area	Fixed cut area
	Coolant	Wet	Wet
Result		<p>piece/corner</p> <p>1,000 2,000 3,000</p> <p>MMT inserts had smaller wear than conventional products. Tool life increased 3 fold.</p>	<p>piece/corner</p> <p>10 20 30 40 50</p> <p>MMT inserts suitable for unstable machining without sudden fracturing. Tool life extended by 1.5 times.</p>

Insert (Grade)		MMT16ER150ISO-S(VP15TF)	MMT16ER150ISO-S(VP15TF)
Workpiece		JIS S45C Bolt ISO Metric M20×1.5 	JIS SCM435 Bolt ISO Metric M12×1.5
	Cutting Conditions		
	Cutting Speed (m/min)	140	80
	Pass	6 times	10 times
	Cutting Method	Radial Infeed	Radial Infeed
	Depth of Cut	Fixed cut area	Fixed cut area
	Coolant	Wet	Wet
Result		<p>piece/corner</p> <p>300 600 900</p> <p>MMT inserts had better chip control and gave smaller burrs on incomplete threads compared to conventional products. 3 times longer tool life was possible.</p>	<p>piece/corner</p> <p>50 100 150</p> <p>Better chip control from the MMT inserts prevented chips wrapping around the workpiece. Tool life lengthened x 1.5</p>

For Your Safety

● Do not touch cutting edges and chips without gloves. ● Machine within the recommended conditions, and replace worn tools with new ones before breakage. ● Use protectors such as safety covers and protective glasses. High-temperature chips can scatter and long chips can be discharged. ● Always take precautions against fire when using water-insoluble coolant. ● Clamp the inserts and parts firmly with the wrench or spanner provided.



www.mitsubishicarbide.com

MMC HARTMETALL GmbH

Comeniusstr. 2, 40670 Meerbusch, Germany
Tel. +49-2159-91890 Fax +49-2159-918966
e-mail marketing@mmch.de

MMC HARDMETAL U.K. LTD.

Mitsubishi House, Galena Close, Tamworth, B77 4AS, U.K.
Tel. +44-1827-312312 Fax +44-1827-312314
e-mail sales@mitsubishicarbide.co.uk

MMC METAL FRANCE S.A.R.L.

6, rue Jacques Monod, 91893 Orsay Cedex, France
Tel. +33-1-69 35 53 53 Fax +33-1-69 35 53 50
e-mail mmfsales@mmc-metal-france.fr

MITSUBISHI MATERIALS ESPAÑA, S.A.

C/Emperador 2, 46136 Museros, Valencia, Spain
Tel. +34-96-144-1711 Fax +34-96-144-3786
e-mail mme@mmevalencia.com

MMC ITALIA S.r.l.

V.le delle Industrie 20/5, 20020 Arese (Mi)
Tel. +39-02 93 77 03 1 Fax +39-02 93 58 90 93
e-mail info@mmc-italia.it

MMC HARDMETAL POLAND Sp. z o.o.

Armii Karjowej 61, Wroclaw, Poland
Tel. +48-71-3351-620 Fax +48-71-3351-620
e-mail mmc@mhpl.pl

MITSUBISHI HARDMETAL RUSSIA OOO LTD.

ul. Bolschaja Pochtovaja, d.36, str.1 105082 Moscow, Russia
Tel. +007-095-72558-85 Fax +007-095-72558-85
e-mail mmc-moscow@lescom.ru